


ELECTRICAL

STANDARD: UL
RATED VOLTAGE: 300V
RATED CURRENT: 20A
CONTACT RESISTANCE: 20mΩ
INSULATION RESISTANCE: 500MΩ / DC 500V
WIRE RANGE: 22-12AWG
DIELECTRIC VOLTAGE: AC 1600V FOR ONE MINUTE



ORDER INFORMATION

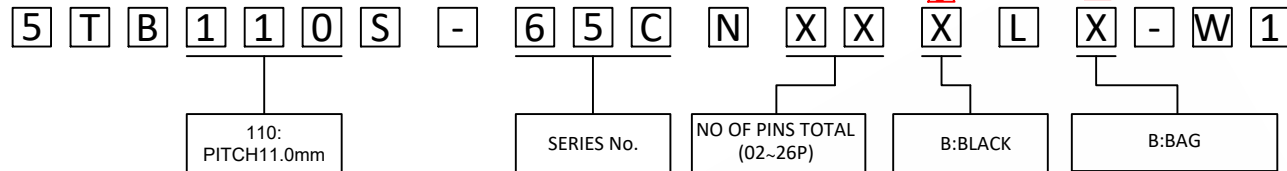

AMTEK 糧德

2024.12.27





Released DCC

MECHANICAL

TORQUE: 1.2Nm
TEMP. RANGE: -40°C ~ +105°C
MAX SOLDERING: +260°C, FOR 5 SEC

MATERIAL

HOUSING: NYLON66, UL94V-0
SCREWS: STEEL, M4 STEEL Ni PLATED
PIN HEADER: COPPER ALLOY, Sn PLATED

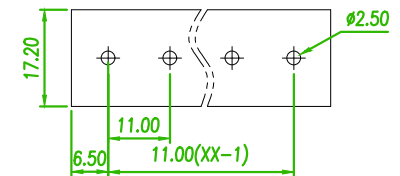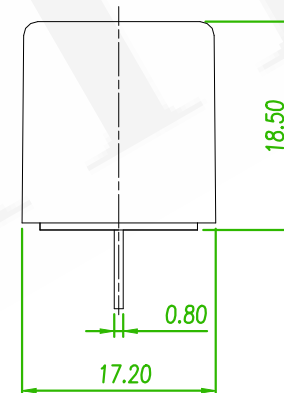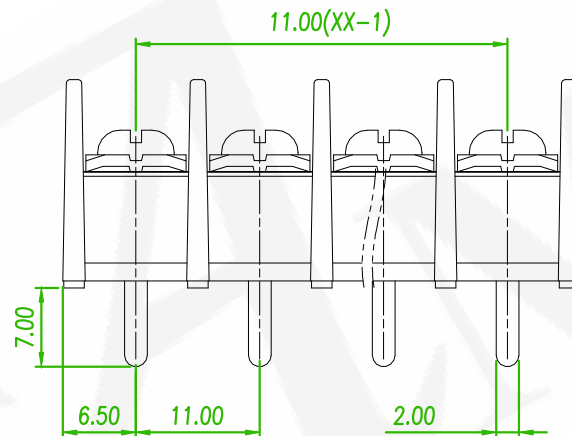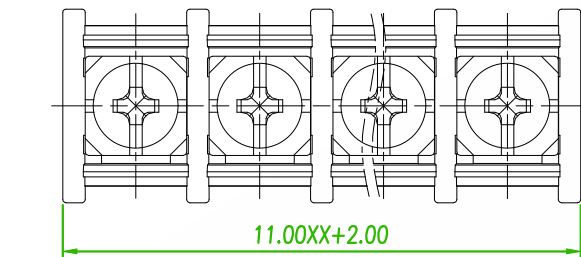

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ±0.05)



linear dimension (Tolerances Standard GB/T 14486-2008)								—	□	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 200	to 10	over 10 to 100	over 100 to 200
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

△	ECN NO: 240348 Revise the drawing	Gaby	2024/12/04
△x2	ECN NO: 201211 Revise the PART NO	Alice	2021/01/04
△x1	ECN NO: 200718 Revise the Tolerance	Alice	2020/11/10
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE


糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	TERMINAL BLOCK BARRIER 11.0mm DIP V/T TYPE				頁數 Page	1/1
品號 PART NO.	5TB110S-65CNXXXLX-W1				繪圖 DRAWN	Mia 2016/09/06
圖號 DRAWING NO.	GN011-N1731	版本 REV.	E	核對 CHECKED	Jonny 2016/09/06	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/09/06	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		