





B **E**

ORDER INFORMATION

5 T B 1 1 0 S - 6 5 H E X X X L X - W 1
 110: PITCH11.0mm SERIES No. NO. OF POLES (02-24P) B:BLACK B:BAG

Released DCC

HOUSING: NYLON66, UL94V-0
SCREWS: STEEL, M4 STEEL Ni PLATED
PIN HEADER: COPPER ALLOY, Sn PLATED

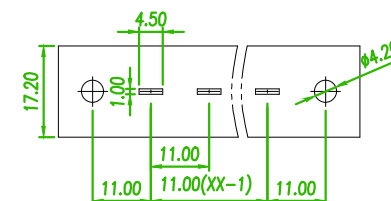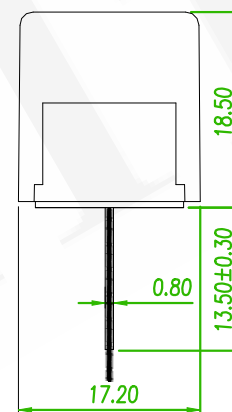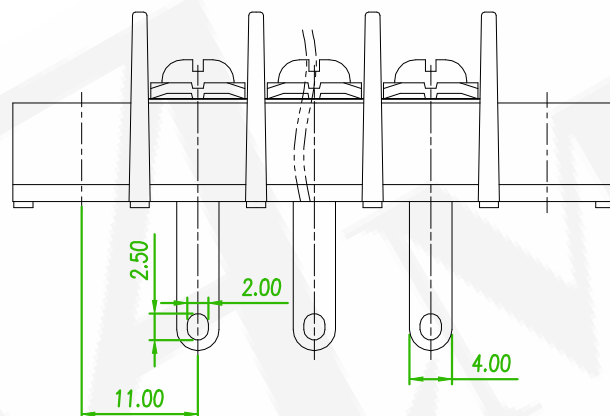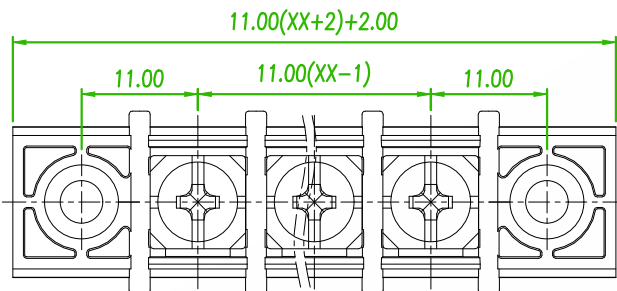

RECOMMENDED PCB LAOUT
(PCB TOLERANCE ± 0.05)



linear dimension(Tolerances Standard GB/T 14486-2008)								—  		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160	to 10	over 10 to 100	over 100
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

	ECN NO:240348 Revise the drawing	Gaby	2024/12/05
 x2	ECN NO:201211 Revise the PART NO	Alice	2021/01/04
 x1	ECN NO:200718 Revise the Tolerance	Alice	2020/11/10
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	TERMINAL BLOCK BARRIER 11.0mm DIP V/T TYPE				頁數 Page	1/1
品號 PART NO.	5TB110S-65HEXXXLX-W1			繪圖 DRAWN	Roy 2018/09/05	
圖號 DRAWING NO.	GN011-RR765	版本 REV.	E	核對 CHECKED	Josh 2018/09/05	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/09/05	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		