

Electrical

Rated Voltage: 300V

Rated Current: 20A

Contact Resistance:20mΩ

Insulation Resistance: 500MΩ / DC 500V

Wire Range: 22-12AWG

Dielectric Voltage: AC 2000V for one minute

Temp. Range: -40°C ~ +105°C

Mechanical

Torque: 1.2Nm

Material

Housing: PA 66, UL94V-0

Screws: M4.0, Steel, Ni Plated

Pin Header: Copper Alloy, Sn Plated

Cover:PC,UL94V-2

ORDER INFORMATION

5 T B 1 1 0 S -

6 8 C

N X X

B L

B - W 1

Series No.

No. of Poles
(02~22P)

B:Black



B:Bag





AMTEK 耀德

2022.03.07

Released DCC

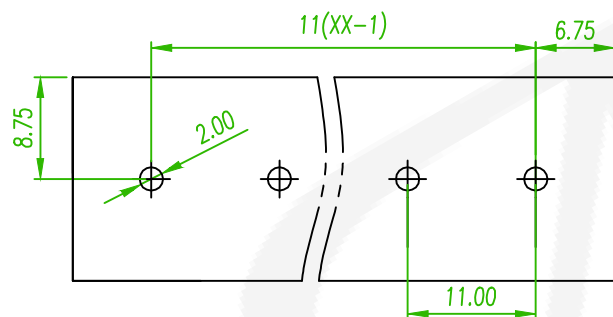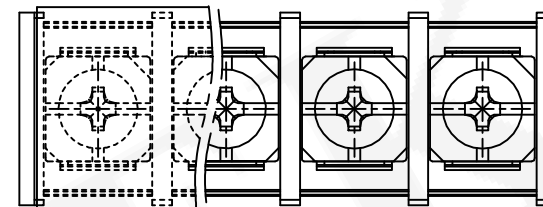

P.C.B. LAYOUT

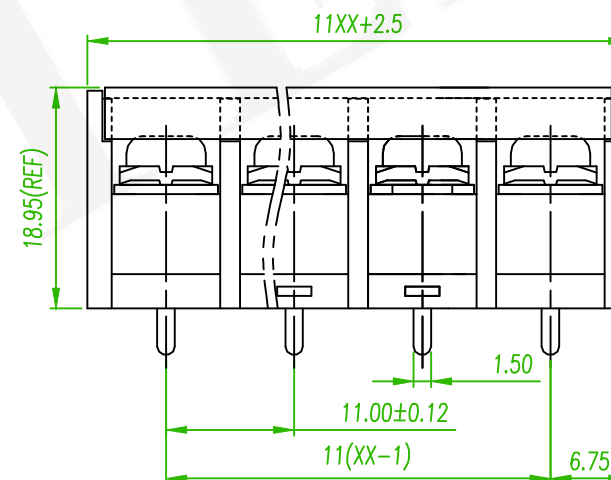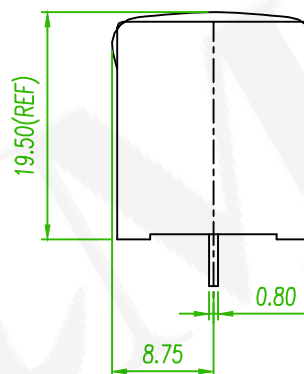

linear dimension(Tolerances Standard GB/T 14486-2008)



variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



耀德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	11.0mm Terminal Block				頁數 Page	1/1
品號 PART NO.	5TB110S-68CNXXBLB-W1				繪圖 DRAWN	Alice 2022/03/04
圖號 DRAWING NO.	GN011-AB034		版本 REV.	A	核對 CHECKED	Josh 2022/03/04
客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Josh 2022/03/04
公差 TOLERANCE			單位 UNIT	mm	THIRD ANGLE PROJECTION	