


DIELECTRIC VOLTAGE: AC 2000V FOR ONE MINUTE

TEMP. RANGE: -40°C ~ +105°C

PIN HEADER: COPPER ALLOY IMITATION GOLD PLATED

Diagram illustrating the mapping of characters to a 125 PITCH:12.5mm label. The characters are: 5, T, B, 1, 2, 5, R, -, E, M, H, E, X, X, X, L, X, -, W, 1. The mapping is: 125, PITCH:12.5mm; SERIES No.; No. OF POLES TOTAL (03); B:BLACK; B:BAG; A:TRAY.

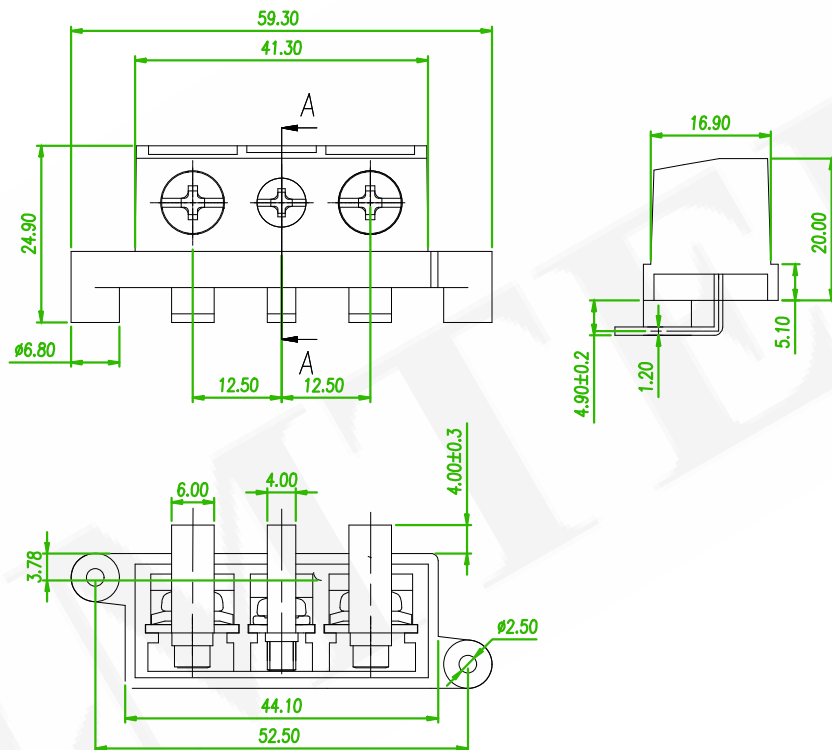

linear dimension(Tolerances Standard GB/T 14486-2008)

linear dimension(Tolerances Standard GB/T 14486-2008)								—		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

	ECN NO:240348 Revise the drawing	Gaby	2025/02/17
 x2	ECN NO:201211 Revise the PART NO	Alice	2021/01/04
 x1	ECN NO:200718 Revise the Tolerance	Alice	2020/11/11
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	TERMINAL BLOCK BARRIER 12.5mm				頁數 Page	1/1
品號 PART NO.	5TB125R-EMHEXXXLX-W1			繪圖 DRAWN	ROY 2018/12/27	
圖號 DRAWING NO.	GN011-R1081	版本 REV.	E	核對 CHECKED	JOSH 2018/12/27	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	JASON 2018/12/27	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		