

MATERIAL

HOUSING: PBT,UL94V-0
SCREWS: M4 STEEL,NI PLATED,TORQUE:1.2N.m

SPECIFICATION

OPERATING TEMPERATURE: -40°C~130°C
SOLDERING TEMPERATURE: 260°C/5SEC
CONTACT RESISTANCE: 20mΩ
INSULATION RESISTANCE: 1000MΩ/DC500V


TECHNICAL DATA

UL/CUL

RATED VOLTAGE (V)	600
RATED CURRENT (A)	50
WITHSTANDING VOLTAGE	2200V (1MIN)
WIRE RANGE	22-8
SOLID/STRANDED (AWG)	

NOTE

SYMBOL " 02 " MEANS SERIAL AS ORDER INFORMATION SHOWN

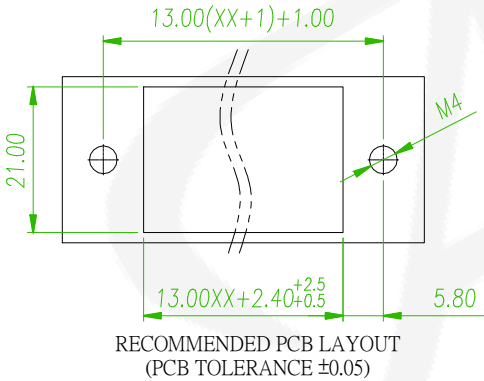

General Tolerances

<i>variable range</i>	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	over 10 to 100	over 100 to	
<i>tolerance</i>	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60



EasyFlow No.:202401240001

Randy

2024/05/20

REV.



ECN NO. OR DESCRIPTION

REVISED

DATE

ORDER INFORMATION

5	T	B	1	3	0	N	-	J	1	0	E	X	X	X	L	X	-	0	2
130: PITCH13.0mm						SERIES NO.			NO OF PINS TOTAL (01~15)			B:BLACK			B:BAG				

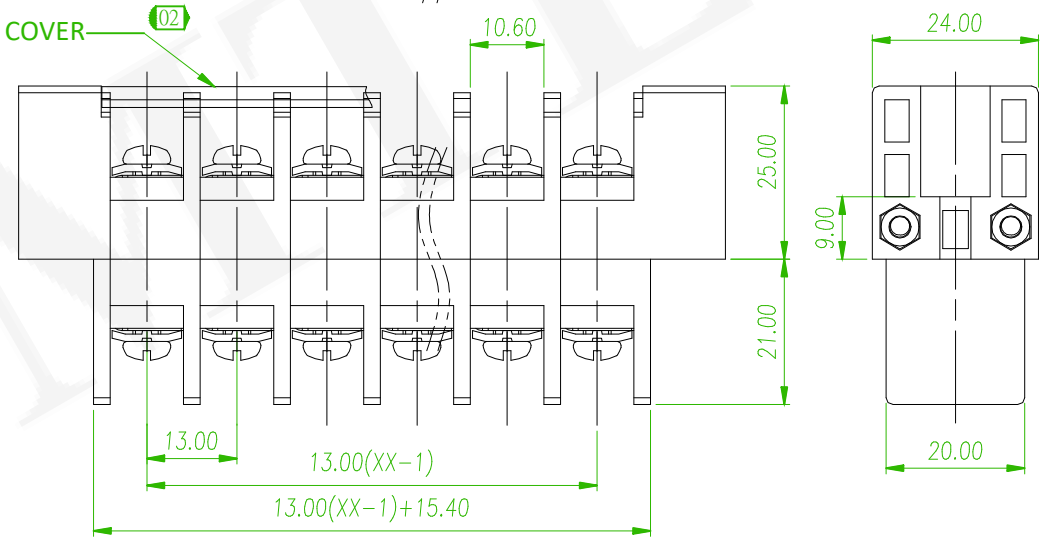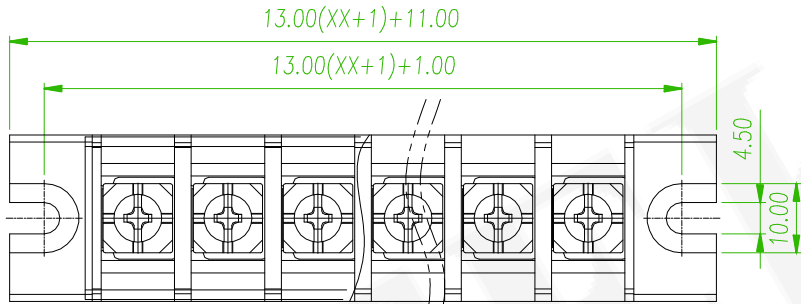

AMTEK 糧德
2024.06.24
Released DCC



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名
TITLE

TERMINAL BLOCK BARRIER 13.0mm

頁數
Page

1/1

品號
PART NO.

5TB130N-J10EXXXLX-02

繪圖
DRAWN

Randy
2024/05/20

圖號
DRAWING NO.

GN011-RD499

版本
REV.

A

核對
CHECKED

Josh
2024/05/20

客戶品號
CUSTOMER P/N

比例
SCALE

None

承認
APPROVED

Josh
2024/05/20

公差
TOLERANCE

單位
UNIT

mm

THIRD ANGLE
PROJECTION

—