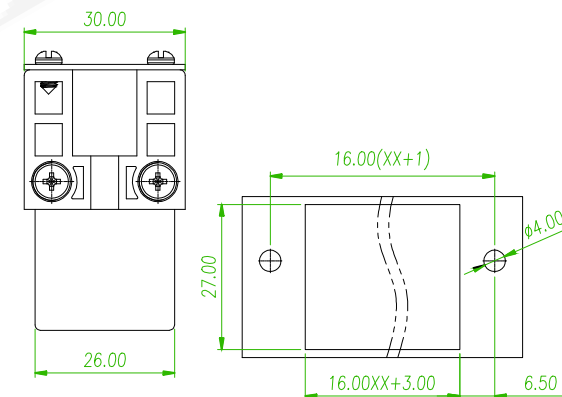
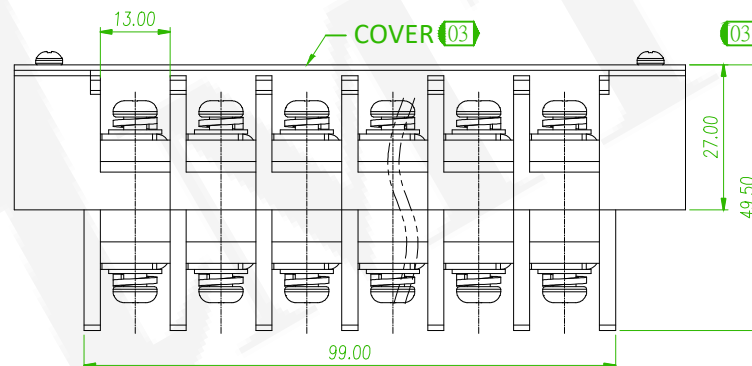


SYMBOL "03" MEANS SERIAL AS ORDER INFORMATION SHOWN

Technical drawing of a 7-bay bridge deck cross-section. The drawing shows a symmetrical cross-section with a central girder and six side girders. Key dimensions are labeled: total width is 16.00(XX+1); distance from centerline to the center of the first side girder is 6.50; distance between adjacent side girders is 16.00; total height is 12.00; and bottom flange thickness is 5.20. A note at the top indicates a reinforcement area of 25 Ø12.00.

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ± 0.05)

General Tolerances								—		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

	EasyFlow No.:202401240001	Randy	2024/05/21
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	TERMINAL BLOCK BARRIER 16.0mm				頁數 Page	1/1
品號 PART NO.	5TB160N-J10EXXXLX-03			繪圖 DRAWN	Randy 2024/05/21	
圖號 DRAWING NO.	GN011-RD507	版本 REV.	A	核對 CHECKED	Josh 2024/05/21	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2024/05/21	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		