

B **E**

UL

30

: 20.

AND

VOL

IST A

-14A

5 T B 7 6 2 S - 2 5 H E X X X L X - W 1

762
PITCH:7.62mm

SERIES No.





POLES
(02-26P)

B:BLACK

B:BAG

MAX SOLDERING: +260°C, FOR 5 SEC

PIN HEADER: COPPER ALLOY, Sn PLATED

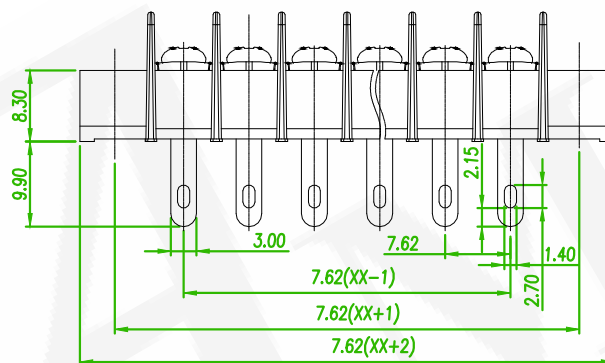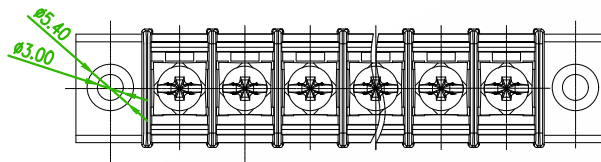

RECOMMENDED PCB LAOUT
(PCB TOLERANCE ± 0.05)



linear dimension(Tolerances Standard GB/T 14486-2008)								—		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

	ECN NO:240348 Revise the drawing	Gaby	2024/12/03
 x2	ECN NO:201211 Revise the PART NO	Alice	2021/01/04
 x1	ECN NO:200718 Revise the Tolerance	Alice	2020/11/12
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	TERMINAL BLOCK BARRIER 7.62mm DIP V/T TYPE				頁數 Page	1/1
品號 PART NO.	5TB762S-25HEXXXLX-W1			繪圖 DRAWN	Eric 2019/01/10	
圖號 DRAWING NO.	GN011-EA533	版本 REV.	E	核對 CHECKED	Josh 2019/01/10	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2019/01/10	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		

AMTEK 糧德

2024.12.27

Released DCC