

ELECTRICAL

STANDARD: UL

RATED VOLTAGE: 150V

RATED CURRENT: 15A


CONTACT RESISTANCE:20mΩ

INSULATION RESISTANCE: 500MΩ / DC 500V

WIRE RANGE: 22-14AWG

DIELECTRIC VOLTAGE: AC 1300V FOR ONE MINUTE

ORDER INFORMATION

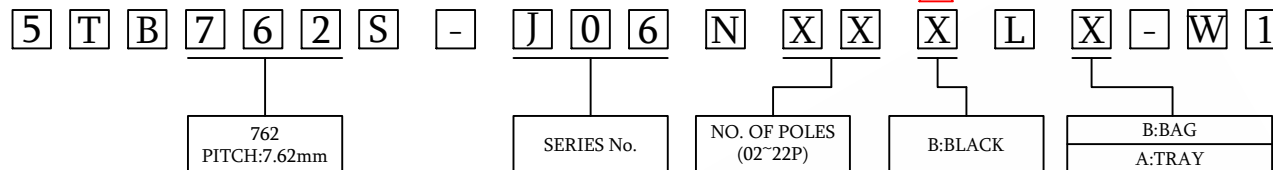

AMTEK 糧德

2024.12.25

Released DCC

MECHANICAL

TORQUE:0.5Nm

TEMP RANGE: -40°C ~ +105°C





MAX SOLDERING: +260°C, FOR 5 SEC

MATERIAL

HOUSING: NYLON66, UL94V-0

SCREWS: STEEL, M3 STEEL Ni PLATED

PIN HEADER: COPPER ALLOY, Sn PLATED

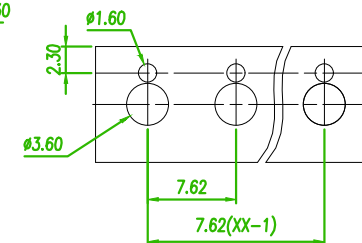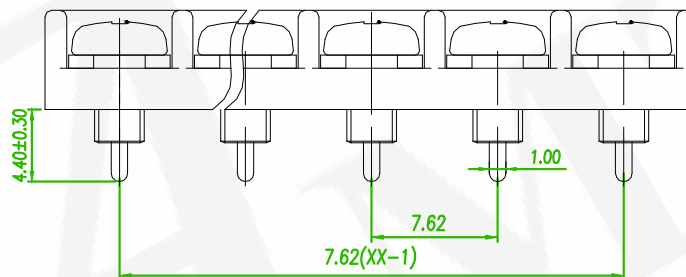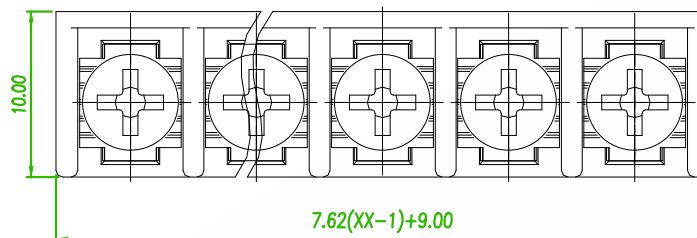

RECOMMENDED PCB LAOUT
(PCB TOLERANCE ±0.05)



linear dimension(Tolerances Standard GB/T 14486-2008)

variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	over 10 to 100	over 100 to 10	over 100 to 10
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

△E	ECN NO:240348 Revise the drawing	Gaby	2024/12/10
△x2	ECN NO:201211 Revise the PART NO	Alice	2021/01/04
△x1	ECN NO:200718 Revise the Tolerance	Alice	2020/11/13
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE


糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	TERMINAL BLOCK BARRIER 7.62mm DIP V/T TYPE				頁數 Page	1/1
品號 PART NO.	5TB762S-J06NXXXLX-W1				繪圖 DRAWN	Roy 2019/01/04
圖號 DRAWING NO.	GN011-R1120	版本 REV.	E	核對 CHECKED	Josh 2019/01/04	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2019/01/04	
公差 TOLERANCE		單位 UNIT	mm	第三 ANGLE PROJECTION		