
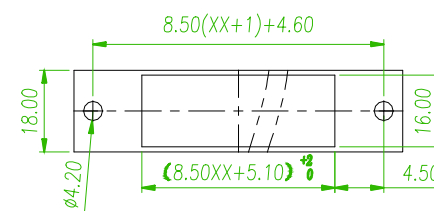
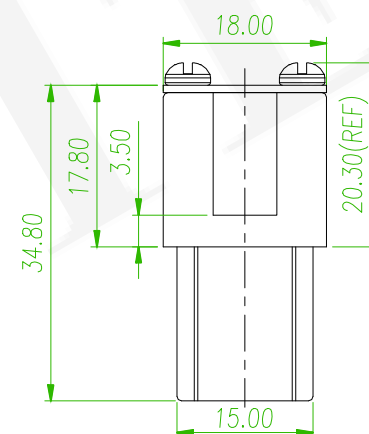


RATED VOLTAGE (V)	300
RATED CURRENT (A)	20
WITHSTANDING VOLTAGE	1600V (1MIN)
WIRE RANGE SOLID/STRANDED (AWG)	22-12

Technical drawing of a mechanical component, likely a pump or valve assembly, showing a side view with dimensions. The drawing includes a central section with a break line (//) and a right-hand section. Dimensions are given in millimeters.

Key dimensions and features:

- Overall length: $8.50(XX+1)+4.60$
- Overall width: 9.00
- Internal diameters: $\phi 4.20$ and $\phi 8.30$
- Spacings and offsets: 2.70 , 7.00 , 10.80 , 7.60 , and 7.00

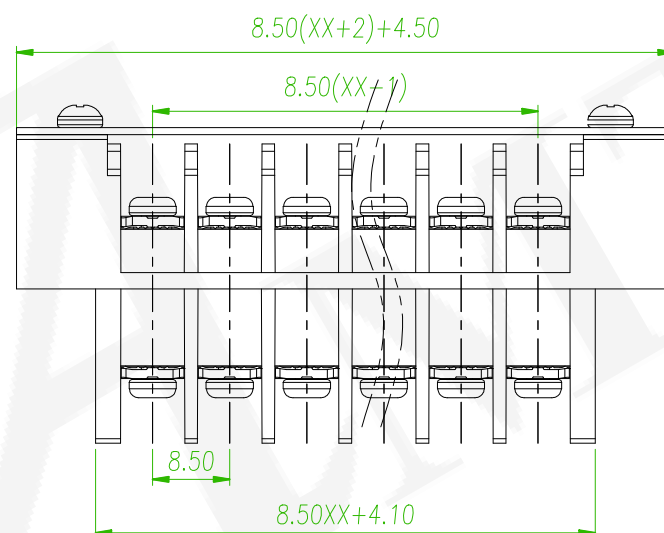

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ± 0.05)

General Tolerances										
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

	EasyFlow No.:202401240001	Randy	2024/05/16
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	TERMINAL BARRIER 8.50mm				頁數 Page	1/1
品號 PART NO.	5TB850N-J10EXXXLX-03			繪圖 DRAWN	Randy 2024/05/16	
圖號 DRAWING NO.	GN011-RD484	版本 REV.	A	核對 CHECKED	Josh 2024/05/16	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2024/05/16	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		