

ORDER INFORMATION

ELECTRICAL





STANDARD: UL IEC
RATED VOLTAGE: 300V 450V
RATED CURRENT: 28A 24A
CONTACT RESISTANCE:20mΩ
INSULATION RESISTANCE: 500MΩ / DC 500V
WITHSTANDING VOLTAGE: AC 1600V FOR ONE MINUTE
WIRE RANGE: 20~12 AWG 2.5mm²

MACHANICAL

TEMP.RANGE:-40°C~+105°C
TORQUE:0.5Nm
STEIP LENGTH:7-8mm

MATERIAL

HOUSING: NYLON66, UL94V-2
CAGE:COPPER ALLOY,M3/Ni PLATED
SCREWS:STEEL,M3

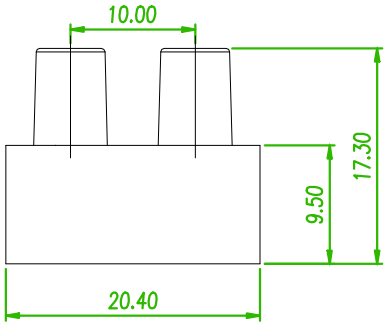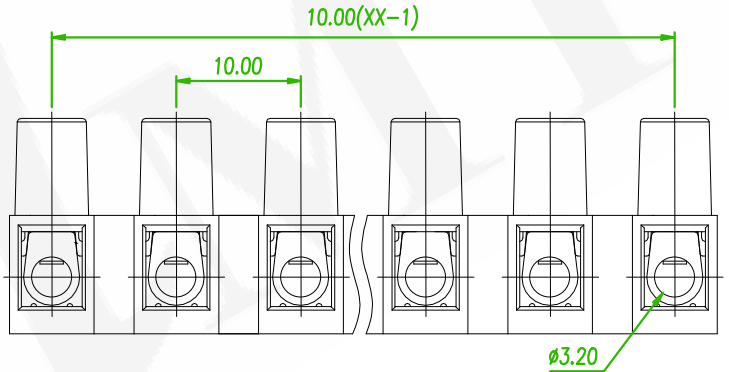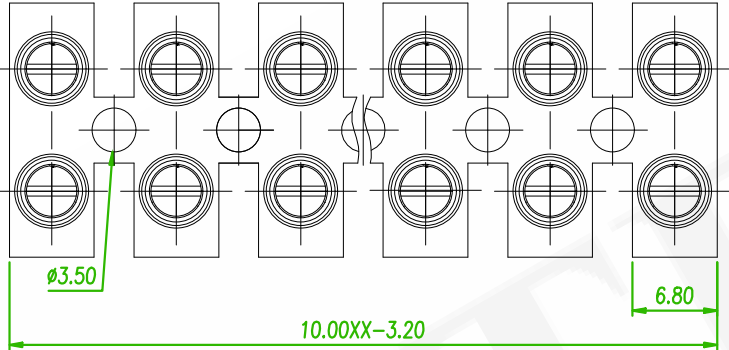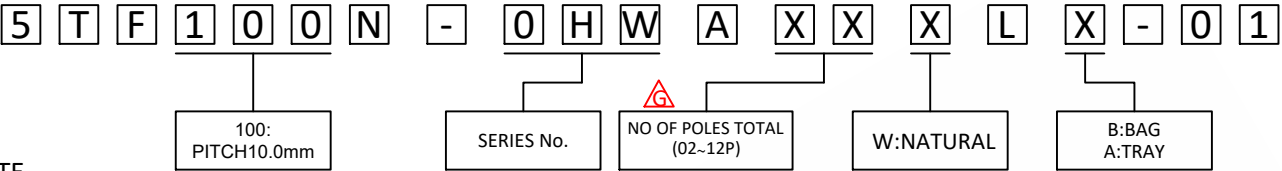

linear dimension(Tolerances Standard GB/T 14486-2008)								—	∕	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	to 10	to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

△	ECN202502009	Willy	2025/03/06
△	ECN NO:240348 Revise the drawing	Gaby	2024/12/02
△	ECN NO:230714 Revise the PART NO.	Alice	2023/09/23
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

AMTEK

糧德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	TERMINAL BLOCK FEED THROUGH 10.0mm				頁數 Page	1/1
品號 PART NO.	5TF100N-0HWAXXXLX-01			繪圖 DRAWN	Mia 2016/12/05	
圖號 DRAWING NO.	GN011-MC109	版本 REV.	G	核對 CHECKED	Jonny 2016/12/05	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/12/05	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		