

ELECTRICAL

STANDARD: UL IEC
RATED VOLTAGE: 600V 750V
RATED CURRENT: 65A 76A
CONTACT RESISTANCE: 20mΩ
WITHSTANDING VOLTAGE: AC 2200V FOR ONE MIN
INSULATION RESISTANCE: 500MΩ/DC500V
WIRE RANGE: 20-6 AWG 16mm²

MECHANICAL

TEMP. RANGE: -40°C ~ +105°C
TORQUE: 1.2Nm
STEIP LENGTH: 7-8mm

MATERIAL

HOUSING: NYLON66, UL94V-2
CAGE: COPPER ALLOY, M4/Ni PLATED
SCREWS: STEEL, M4

ORDER INFORMATION

5 T F 1 4 6 N - 1 6 H A X X X L X - 0 1



146
PITCH: 14.6mm

SERIES No.

NO OF POLES TOTAL
(02-12P)

G: GRAY

A: TRAY
B: BAG

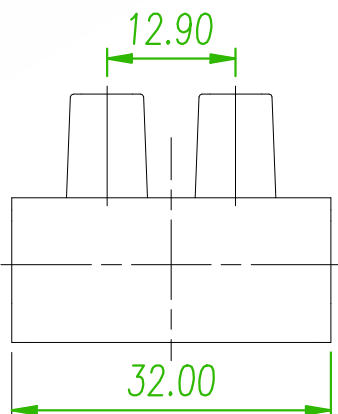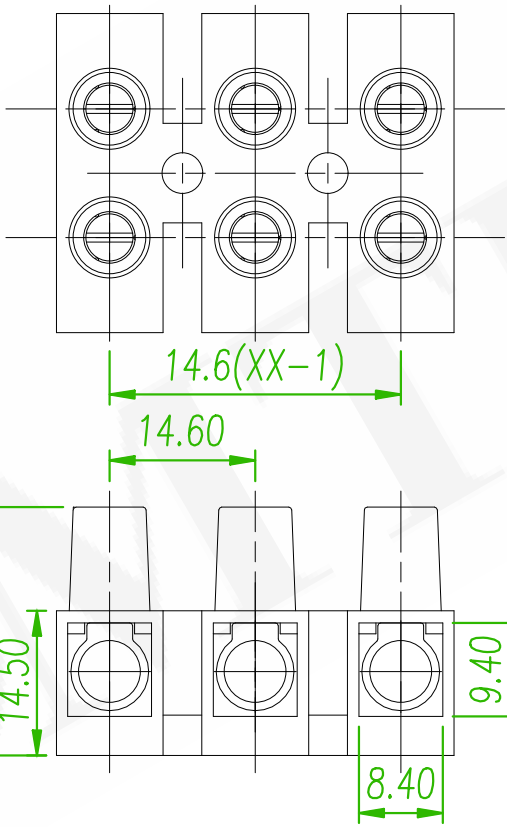

linear dimension(Tolerances Standard GB/T 14486-2008)								—	□	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

△	ECN202502009	Willy	2025/03/06
△	ECN NO:240348 Revise the drawing	Gaby	2024/12/02
△	ECN NO:230714 Revise the PART NO.	Alice	2023/09/23
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE


糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	TERMINAL BLOCK FEED THROUGH 14.6mm				頁數 Page	1/1
品號 PART NO.	5TF146N-16HAXXXLX-01				繪圖 DRAWN	Eric 2018/12/27
圖號 DRAWING NO.	GN011-EA416	版本 REV.	F	核對 CHECKED	Josh 2018/12/27	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/12/27	
公差 TOLERANCE		單位 UNIT	mm	第三 ANGLE PROJECTION		