


Electrical 
STANDARD: UL IEC
RATED VOLTAGE: 600V 450V
RATED CURRENT: 20A 32A
CONTACT RESISTANCE: 20mΩ
INSULATION RESISTANCE: 500mΩ / DC 500V
WITHSTANDING VOLTAGE: AC 2200V FOR ONE MIN
WIRE RANGE:20~12AWG 1.0-4.0mm²

ORDER INFORMATION

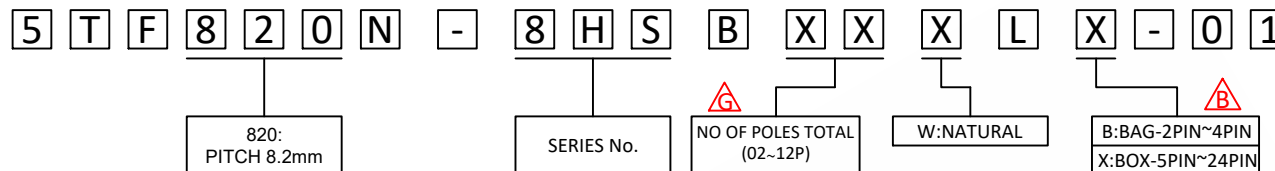


MECHANICAL

TEMP. RANGE: -40°C ~ +105°C
STEIP LENGTH:7-8mm
TORQUE(MAX):0.4Nm(3.6LB.IN)

MATERIAL

HOUSING: NYLON66, UL94V-2
CAGE:SPCC,M2.5/Zn PLATED
SCREW:STEEL,M2.5

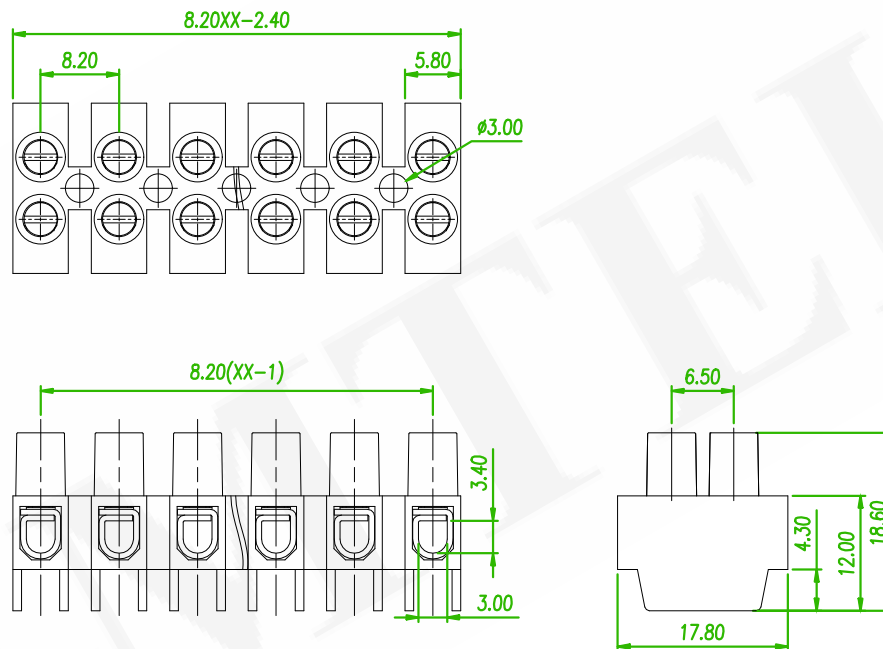

linear dimension(Tolerances Standard GB/T 14486-2008)



variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 100	to 10	over 10 to 100	over 100 to 100
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

	ECN 202502009	Willy	2024/03/06
	ECN NO:240348 Revise the drawing	Gaby	2024/12/02
	ECN NO:230714 Revise the PART NO.	Alice	2023/09/23
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



品名 TITLE	TERMINAL BLOCK FEED THROUGH 8.20mm				頁數 Page	1/1
品號 PART NO.	5TF820N-8HSBXXXXLX-01				繪圖 DRAWN	Mia 2016/04/19
圖號 DRAWING NO.	GN011-N1333	版本 REV.	G	核對 CHECKED	Sabrina 2016/04/19	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2016/04/19	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		