

Electrical
Standard: UL IEC
Rated Voltage: 300V 130V
Rated Current: 10A 10A
Contact Resistance: 20mΩ
Insulation Resistance: 500MΩ / DC 500V
With standing Voltage: AC 2000V for one min

Mechanical
Wire Range:28 ~ 14 AWG 1.5mm²
Strip Length: 8-9mm
Temp. Range: -40°C ~ +105°C

Dimensions
Pitch: 3.5mm
Poles:2-24P

Material
Housing: PA66, UL94V-0
Wire guard:Stainless Steel
Clamp:Phosphor Bronze,Tin Plated

ORDER INFORMATION

5 T M 3 5 0 N - W 0 1 N x x W L B - 0 1

350:
Pitch 3.50mm

Series No.





No of Pins total
(02~24)

W:White

B:Bag



AMTEK 耀德
2020.11.02
Released DCC

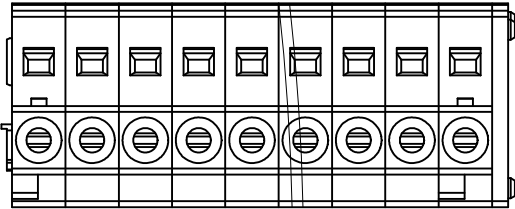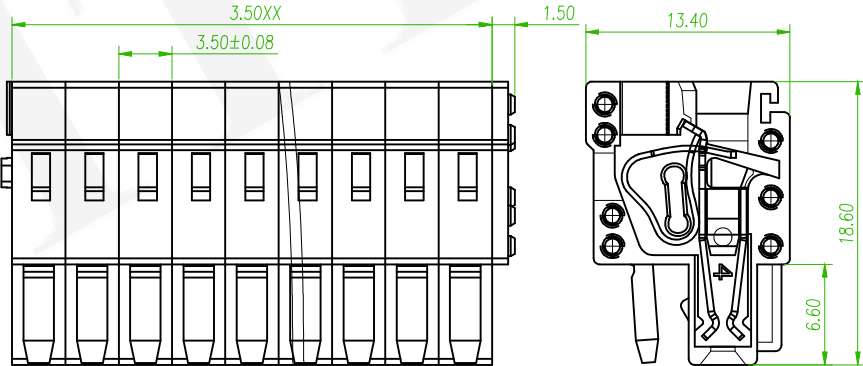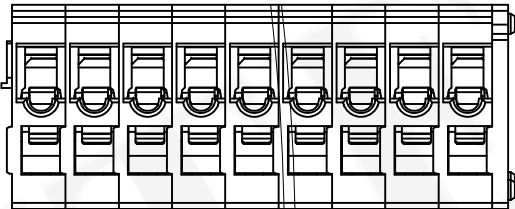

linear dimension(Tolerances Standard GB/T 14486-2008)								—	∕	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60
ECN NO:200718 Revise the Tolerance								Alice	2020/10/28	
REV.	ECN NO. OR DESCRIPTION							REVISED	DATE	



耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	Terminal Block				頁數 Page	1/1
品號 PART NO.	5TM350N-W01NxxWLB-01			繪圖 DRAWN	Roy 2015/03/10	
圖號 DRAWING NO.	GN011-AL451			版本 REV.	B	核對 CHECKED Wanling 2015/03/10
客戶品號 CUSTOMER P/N				比例 SCALE	None	承認 APPROVED Joey 2015/03/10
公差 TOLERANCE				單位 UNIT	mm	THIRD ANGLE PROJECTION