

Electrical

Standard: UL IEC
Rated Voltage: 300V 130V
Rated Current: 10A 10A
Contact Resistance: 20mΩ
Insulation Resistance: 500MΩ/DC500V
Withstanding Voltage: AC 2000V for one minute
Wire Range: 28~14AWG 1.5mm²

Mechanical

Temp. Range: -40°C ~ +105°C
Steip Length: 8-9mm

Material

Housing: NY66, UL94V-0
Clamp: Copper Alloy, Sn Plated
Wire Guard: Stainless Steel

ORDER INFORMATION

5 T M 3 5 0 N - W 0 2 E X X W L B - 0 1






350:
Pitch 3.5mm

Series No.


Poles
02~24P

W: White

B: Bag

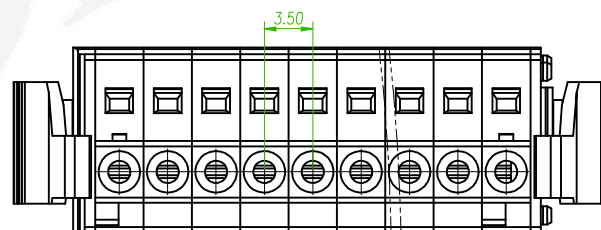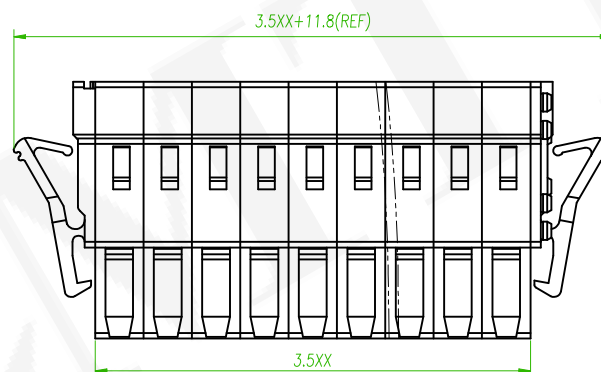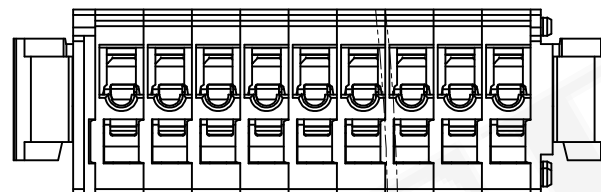

linear dimension (Tolerances Standard GB/T 14486-2008)



variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60



ECN NO: 200718 Revise the Tolerance

Alice

2020/10/28

REV.

ECN NO. OR DESCRIPTION

REVISED

DATE



糧德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名
TITLE

品號
PART NO.

圖號
DRAWING NO.

客戶品號
CUSTOMER P/N

公差
TOLERANCE

3.5mm Terminal Block

5TM350N-W02EXXWLB-01

GN011-MD482

版本
REV.

B

比例
SCALE

None

單位
UNIT

mm

繪圖
DRAWN
核對
CHECKED
承認
APPROVED
THIRD ANGLE
PROJECTION

頁數
Page

1/1

Mia
2018/09/19

Josh
2018/09/19

Jason
2018/09/19

