

ELECTRICAL

Standard: UL IEC
 Rated Voltage: 300V 250V
 Rated Current: 15A 16A
 Contact Resistance: 20mΩ
 Withstanding Voltage: AC 2000V for one min
 Insulation Resistance: 500MΩ
 Wire range: 28-12AWG 2.5mm²

MECHANICAL

Temp. Range: -40°C ~ +105°C
 Steip length: 8-9mm

MATERIAL

Housing: PA66, UL94V-0
 Clamp: Phosphor bronze, Tin plated
 Wire guard: Stainless steel

ORDER INFORMATION

5 T M 5 0 8 N - W 0 2 N X X O L X - 0 1




Series No.

Poles
(02-24P)


O:Orange

A:Tray
B:Bag

AMTEK 耀德
 2020.11.05
 Released DCC

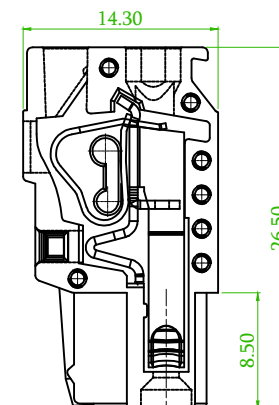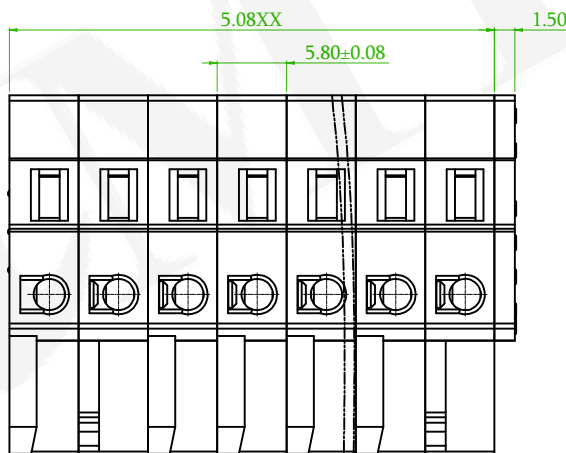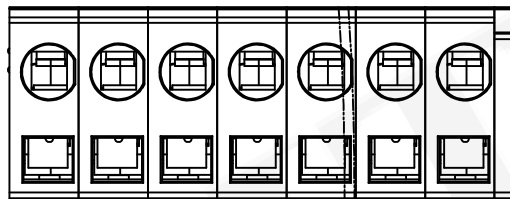

linear dimension(Tolerances Standard GB/T 14486-2008)



variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 250	to 10	over 10 to 100	over 100 to 250
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60



ECN NO:200718 Revise the Tolerance

Alice

2020/11/02

REV.

ECN NO. OR DESCRIPTION

REVISED

DATE



耀德精密有限公司
 Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
 FAX: 886-2-2260-8030

品名

TITLE

5.08mm Terminal Block

品號

PART NO.

5TM508N-W02NXXOLX-01

圖號

DRAWING NO.

GN011-EA420

客戶品號

CUSTOMER P/N

公差

TOLERANCE

版本

REV.

B

比例

SCALE

None

單位

UNIT

mm

繪圖

DRAWN

核對

CHECKED

承認

APPROVED

THIRD

ANGLE

PROJECTION

頁數
Page

1/1

Eric

2018/12/27

Josh

2018/12/27

Jason

2018/12/27

THIRD

ANGLE

PROJECTION