

ELECTRICAL ⚠

Standard: UL IEC
Rated Voltage: 300V 320V
Rated Current: 15A 16A
Withstanding Voltage: AC 1600V for one min

MECHANICAL

Temp. Range: -40°C ~+105°C
Steip length: 8-9mm
Wire range: 28-12AWG 0.25~2.5mm²

MATERIAL

Housing: PA66, UL94V-0
Clamp: Copper Alloy, Tin Plated

ORDER INFORMATION




5 T M 5 0 8 N - W 0 8 E X X X L X - 0 1

Series No.	Poles (02-24P)	O:Orange	A:Tray B:Bag
------------	-------------------	----------	-----------------

AMTEK 糧德

2024.01.19

Released DCC

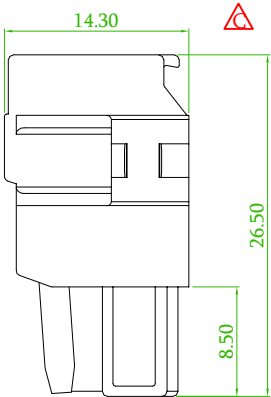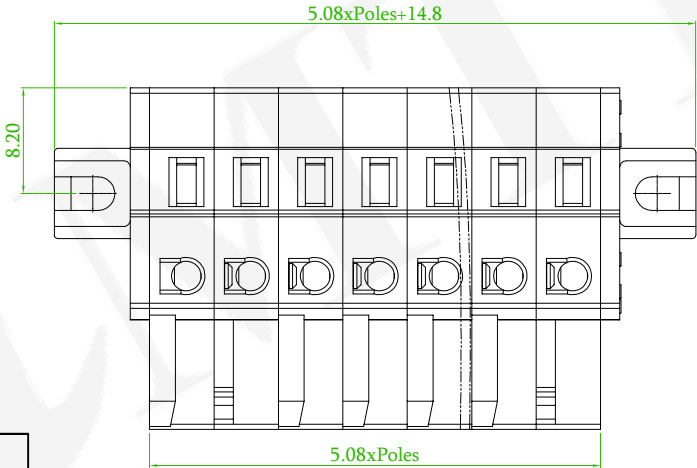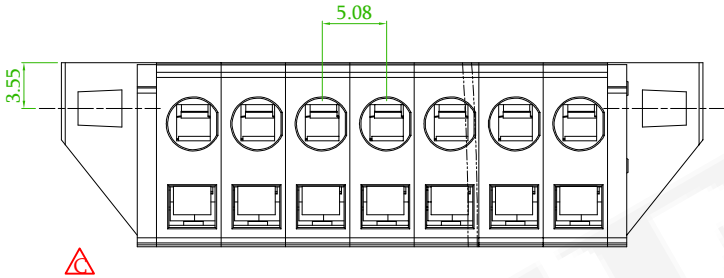

linear dimension(Tolerances Standard GB/T 14486-2008)								—	∕	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

⚠	QEC No.: 240104 Revise the drawing	Randy	2024/01/15
⚠x1	ECN NO:200718 Revise the Tolerance	Alice	2020/11/02
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	5.08mm Terminal Block				頁數 Page	1/1
品號 PART NO.	5TM508N-W08EXXXLX-01			繪圖 DRAWN	Eric 2019/01/03	
圖號 DRAWING NO.	GN011-EA431	版本 REV.	C	核對 CHECKED	Josh 2019/01/03	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2019/01/03	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		