

Electrical

Standard: UL IEC
Rated Voltage: 300V 250V
Rated Current: 15A 16A
Contact Resistance: 20mΩ
Insulation Resistance: 500MΩ/DC500V
Withstanding Voltage: AC 2000V for one minute
Wire Range: 28~12AWG 2.5mm²

Mechanical

Temp. Range: -40°C ~ +105°C
Steip Length: 8-9mm

Material

Housing: NY66, UL94V-0
Clamp: Phosphor Bronze, Tin Plated
Wire Guard: Stainless Steel

ORDER INFORMATION

5 T M 7 5 0 N - W 0 1 N X X G L B - 0 1





750:
Pitch 7.5mm

Series No.

Poles
02~24P

G: Gray

B: Bag

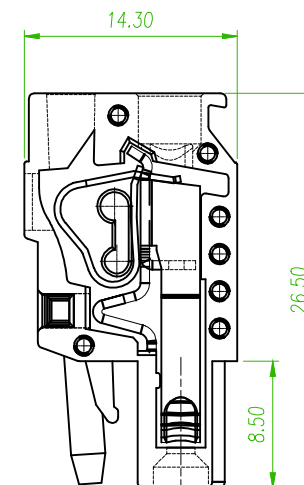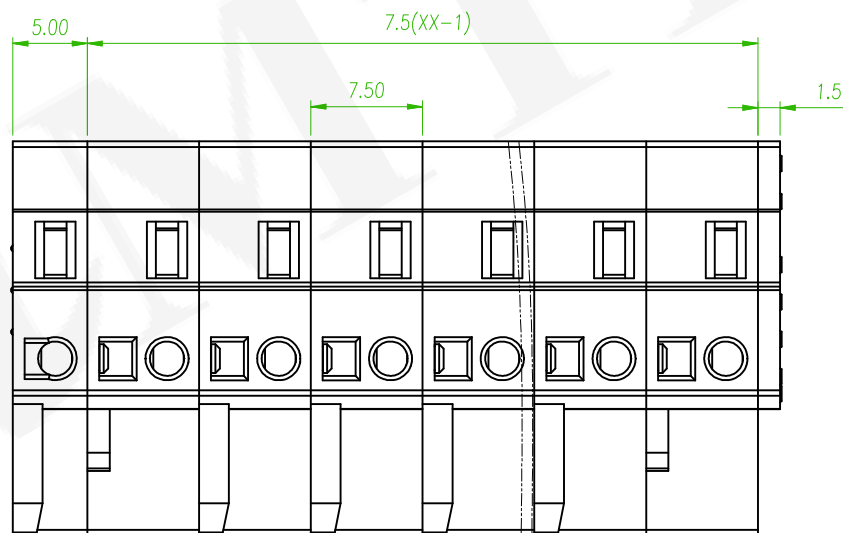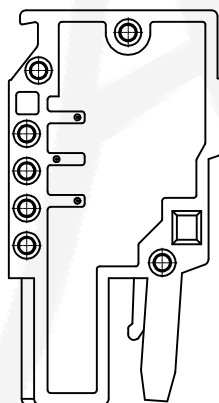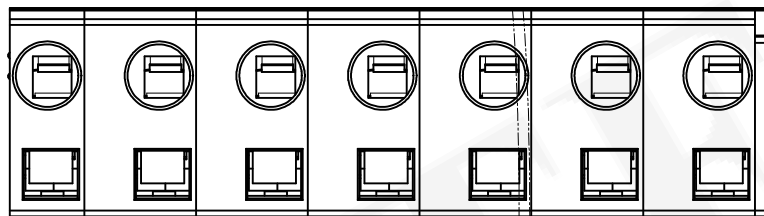

linear dimension (Tolerances Standard GB/T 14486-2008)



variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60



ECN NO: 200718 Revise the Tolerance

Alice

2020/11/03

ECN NO. OR DESCRIPTION

REVISED

DATE



糧德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名

TITLE

品號

PART NO.

圖號

DRAWING NO.

客戶品號

CUSTOMER P/N

公差

TOLERANCE

7.5mm Terminal Block

5TM750N-W01NXXGLB-01

GN011-MD478

版本

REV.

比例

SCALE

單位

UNIT

B

None

mm

繪圖

DRAWN

核對

CHECKED

承認

APPROVED

THIRD ANGLE
PROJECTION

頁數

Page

1/1

Mia

2018/09/19

Josh

2018/09/19

Jason

2018/09/19