
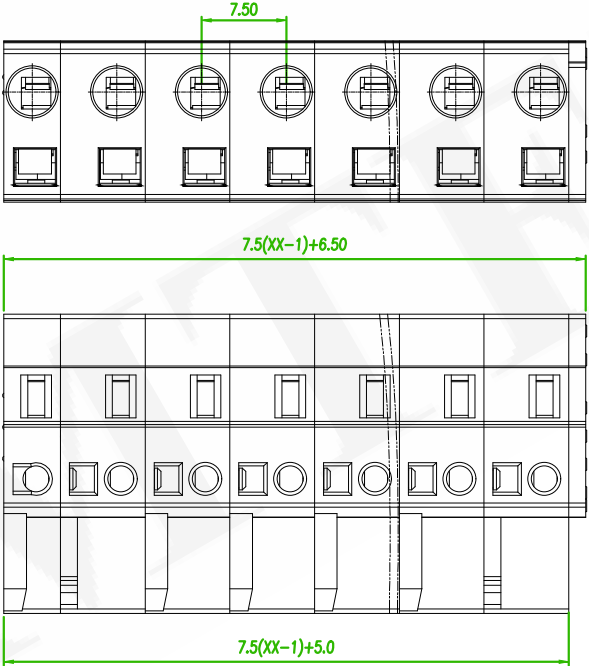


MATERIAL
HOUSING: NYLON66, UL94V-0
COVER: NYLON66, UL94V-0
CLAMP: COPPER ALLOY, Sn PLATED
SHRAPNEL: STAINLESS STEEL

MECHANICAL
OPERATING TEMPERATURE: -40°C~+105°C
STRIPPING LENGTH: 8~9mm

TECHNICAL DATA

SAFETY APPROVAL			
USE GROUP			
RATED VOLTAGE (V)			
RATED CURRENT (A)			
WIRE RANGE			
SOLID/STRANDED (AWG)			
WITHSTANDING VOLTAGE			
IEC			
OVERVOLTAGE CATEGORY			
CONTAMINATION CLASS			
RATED VOLTAGE (V)			
RATED CURRENT (A)			
IMPULSE WITHSTANDING VOLTAGE (KV)			
CONDUCTOR CROSS SECTION			
SOLID/FLEXIBLE (mm ²)			

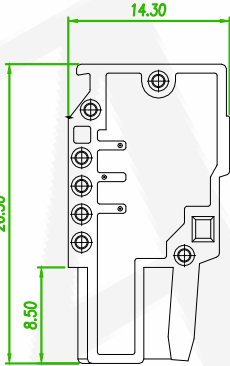

linear dimension(Tolerances Standard GB/T 14486-2008)								—	∠	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
△	ECN NO:240348 Revise the drawing	Gaby	2024/11/26
△x1	ECN NO:200718 Revise the Tolerance	Alice	2020/11/03



Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	TERMINAL BLOCK MCS 7.50mm				頁數 Page	1/1
品號 PART NO.	5TM750N-W02NXXXLX-01			繪圖 DRAWN	ERIC 2019/01/03	
圖號 DRAWING NO.	GN011-EA432	版本 REV.	C	核對 CHECKED	JOSH 2019/01/03	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	JASON 2019/01/03	
公差 TOLERANCE		單位 UNIT	mm	第三 ANGLE PROJECTION		