

**ELECTRICAL**

Standard: UL IEC  
 Rated Voltage: 300V 250V  
 Rated Current: 15A 16A

Contact Resistance: 20mΩ

Insulation Resistance: 500MΩ / DC 500V

Wire Range: 28~12AWG 2.5mm<sup>2</sup>

Withstanding Voltage: AC 2000V for one minute

**ORDER INFORMATION**

5 T M 7 5 0 R - J 0 4 E X X G L X - 0 1

Series No.

No of Pins total  
(02-24)

G:Gray

A:Tray  
B:Bag



AMTEK 義德  
2020.11.30  
Released DCC

**MECHANICAL**







Steep Length: 8-9mm  
 Temp. Range: -40°C ~ +105°C

**Dimensions**

Pitch: 7.5mm  
 Poles: 2-24P

**MATERIAL**

Housing: PA66, UL94V-0  
 Wire guard: Stainless Steel  
 Pin header: Red Copper, Tin plated

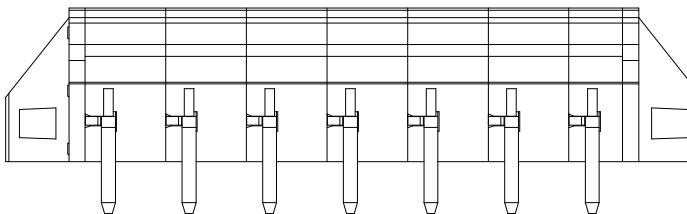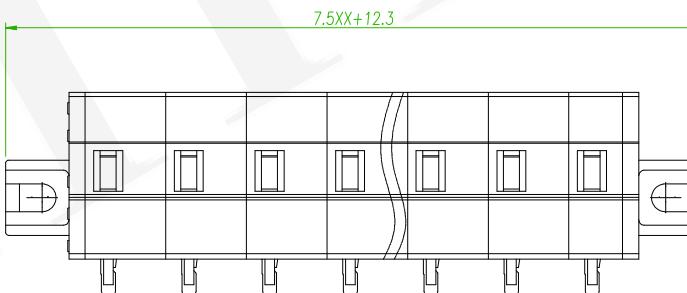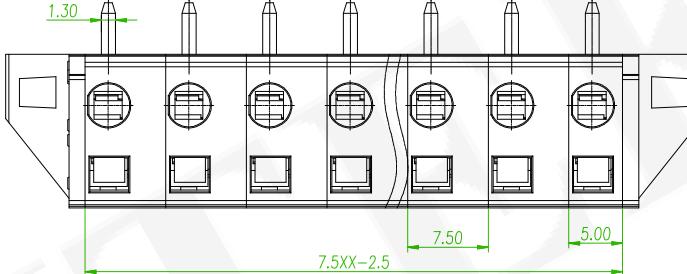

linear dimension(Tolerances Standard GB/T 14486-2008)										—	□	上
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to		
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60		

**ECN NO:200718 Revise the Tolerance**

Alice 2020/11/04

REV. ECN NO. OR DESCRIPTION

REVISED DATE

品名 TITLE	Terminal Block			頁數 Page	1/1
品號 PART NO.	5TM750R-J04EXXGLX-01			繪圖 DRAWN	Nick 2020/02/06
圖號 DRAWING NO.	GN011-NI819	版本 REV.	B	核對 CHECKED	Josh 2020/02/06
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2020/02/06
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION	