

ELECTRICAL

Standard: UL IEC
Rated Voltage: 300V 250V
Rated Current: 15A 16A
Contact Resistance: 20mΩ
Insulation Resistance: 500MΩ / DC 500V
Wire Rang: 28~12AWG 2.5mm²
Withstanding Voltage: AC 2000V for one minute

MECHANICAL

Steip Length: 8-9mm
Temp. Range: -40°C~+105°C

Dimensions

Pitch: 7.62mm
Poles: 2-24P






MATERIAL

Housing: PA66, UL94V-0
Wire guard: Stainless Steel
Pin header: Copper alloy, Sn plated

ORDER INFORMATION

5 T M 7 6 2 N - J 0 3 E X X O L X - 0 1

Series No.	No of Pins total (02-24)	O:Orange	A:Tray B:Bag
------------	-----------------------------	----------	-----------------

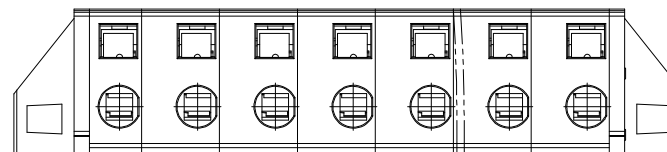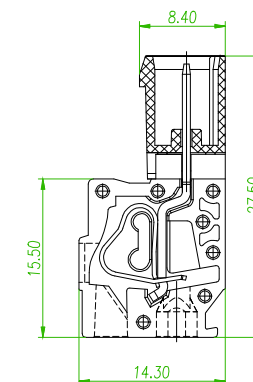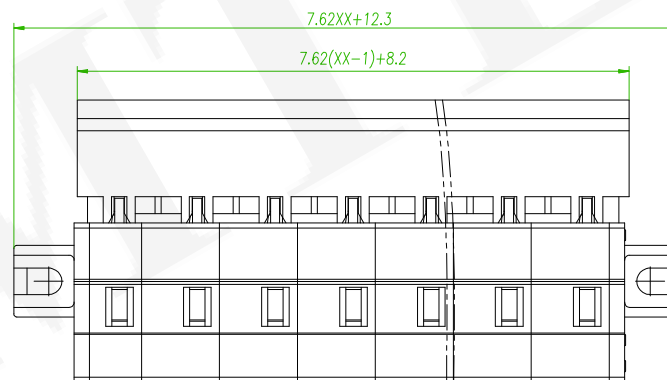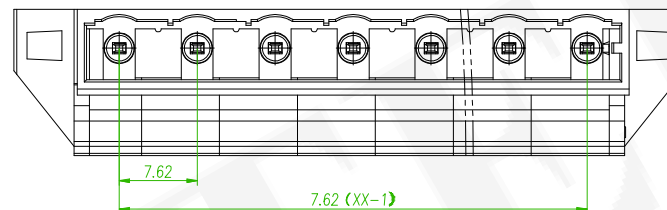

linear dimension (Tolerances Standard GB/T 14486-2008)



<i>variable range</i>	<i>to 6</i>	<i>over 6 to 10</i>	<i>over 10 to 30</i>	<i>over 30 to 60</i>	<i>over 60 to 100</i>	<i>over 100 to 160</i>	<i>over 160 to 10</i>	<i>to 10</i>	<i>over 10 to 100</i>	<i>over 100 to 100</i>
<i>tolerance</i>	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60



糧德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	Terminal Block				頁數 Page	1/1
品號 PART NO.	5TM762N-J03EXXOLX-01				繪圖 DRAWN	Benson 2020/02/03
圖號 DRAWING NO.	GN011-BS797	版本 REV.	B	核對 CHECKED	Josh 2020/02/03	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2020/02/03	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		



ECN NO: 200718 Revise the Tolerance

Alice

2020/11/04

REV.

ECN NO. OR DESCRIPTION

REVISED

DATE