

ELECTRICAL

Standard: UL IEC
Rated Voltage: 300V 250V
Rated Current: 15A 16A
Contact Resistance: 20mΩ
Insulation Resistance: 500MΩ / DC 500V
Wire Rang: 28~12AWG 2.5mm²
Withstanding Voltage: AC 2000V for one minute

MECHANICAL

Steip Length: 8-9mm
Temp. Range: -40°C~+105°C

Dimensions

Pitch: 7.62mm
Poles: 2-24P






MATERIAL

Housing: PA66, UL94V-0
Wire guard: Stainless Steel
Pin header: Copper alloy, Sn plated


ORDER INFORMATION

5 T M 7 6 2 N - J 0 6 E X X O L X - 0 1

Series No.	No of Pins total (02-24)	O:Orange	A:Tray B:Bag
------------	-----------------------------	----------	-----------------

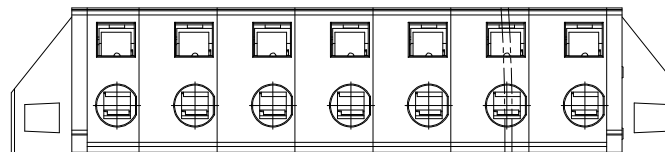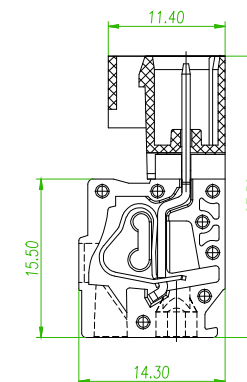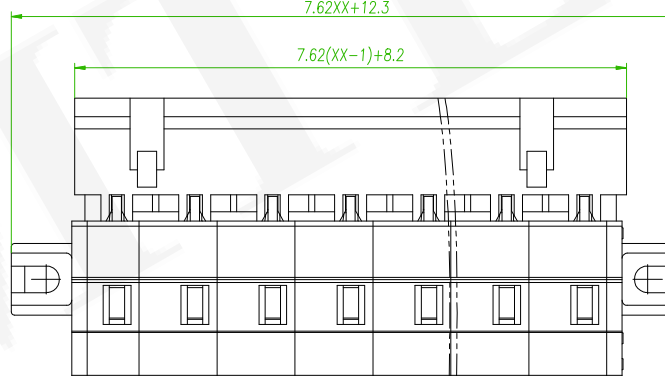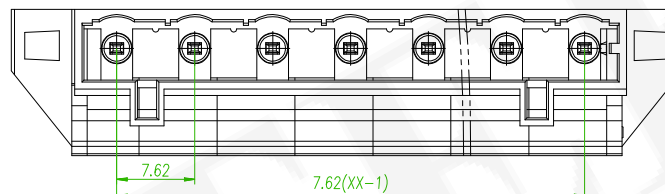

linear dimension (Tolerances Standard GB/T 14486-2008)



variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
1	ECN NO: 200718 Revise the Tolerance	Alice	2020/11/04



糧德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	Terminal Block				頁數 Page	1/1
品號 PART NO.	5TM762N-J06EXXOLX-01				繪圖 DRAWN	Benson 2020/02/03
圖號 DRAWING NO.	GN011-BS800	版本 REV.	B	核對 CHECKED	Josh 2020/02/03	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2020/02/03	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		