

Electrical

Standard: UL IEC
Rated Voltage: 300V 250V
Rated Current: 15A 12A
Contact Resistance: 20mΩ
Insulation Resistance: 500MΩ / DC 500V
With standing Voltage: AC 2000V for one min
Wire range: 28~12AWG 2.5mm²

Mechanical

Strip Length: 8-9mm
Temp. Range: -40°C ~ +105°C

Dimensions

Pitch: 7.62mm
Poles: 2-24P

Material

Housing: PA66, UL94V-0
Wire guard: Stainless Steel
Clamp: Phosphor Bronze, Tin Plated

ORDER INFORMATION

5 T M 7 6 2 N - W 0 1 N x x O L B - 0 1





762:
Pitch 7.62mm

Series No.

No of Pins total
(02~24)

O:Orange

B:Bag

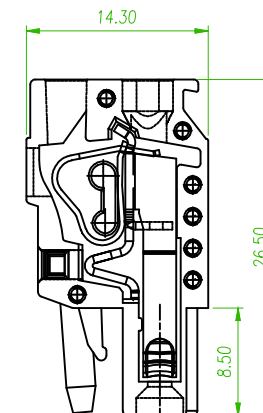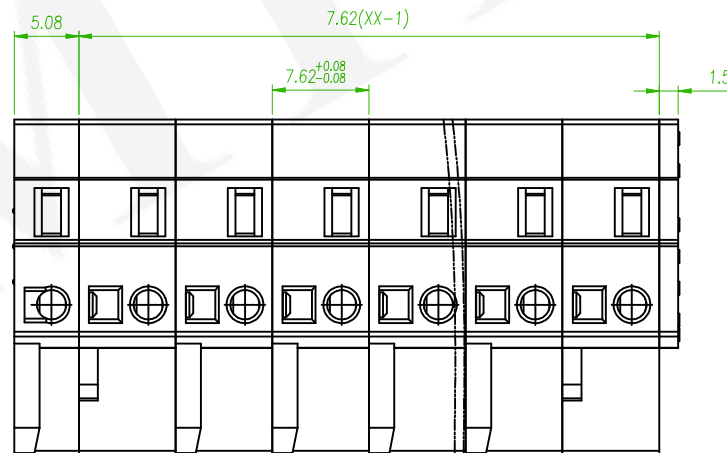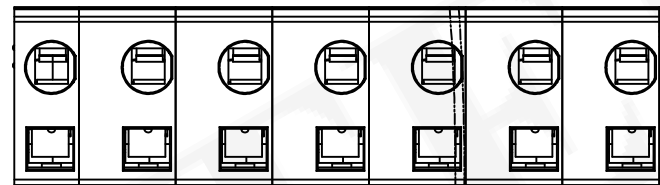

linear dimension (Tolerances Standard GB/T 14486-2008)



variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60



ECN NO:200718 Revise the Tolerance

Alice

2020/11/04

REV.

ECN NO. OR DESCRIPTION

REVISED

DATE



糧德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	Terminal Block				頁數 Page	1/1
品號 PART NO.	5TM762N-W01NxxOLB-01				繪圖 DRAWN	Mia 2015/03/10
圖號 DRAWING NO.	GN011-AL472				版本 REV.	B
客戶品號 CUSTOMER P/N					核對 CHECKED	Wanling 2015/03/10
公差 TOLERANCE					比例 SCALE	None
					承認 APPROVED	Joey 2015/03/10
					單位 UNIT	mm
					THIRD ANGLE PROJECTION	