

MATERIAL
HOUSING: NYLON66, UL94V-0
PIN HEADER: COPPER ALLOY, Sn PLATED

MECHANICAL
OPERATING TEMPERATURE: -40°C~+105°C
SOLDERING TEMPERATURE: 260°C/5S





TECHNICAL DATA 
UL/CUL

SAFETY APPROVAL			
USE GROUP	B	C	D
RATED VOLTAGE (V)	300	-	300
RATED CURRENT (A)	15	-	10
WIRE RANGE	/		
SOLID/STRANDED (AWG)	/		
WITHSTANDING VOLTAGE	1600V (1MIN)		

IEC	IEC61984		
OVERVOLTAGE CATEGORY	III	III	II
CONTAMINATION CLASS	3	2	2
RATED VOLTAGE (V)	320	320	630
RATED CURRENT (A)	12	12	12
IMPULSE WITHSTANDING VOLTAGE (KV)	4.0	4.0	4.0
CONDUCTOR CROSS SECTION	/		
SOLID/FLEXIBLE (mm ²)	/		

ORDER INFORMATION

5	T	M	7	6	2	R	-	W	0	2	N	X	X	X	L	X	-	0	1
762 PITCH: 7.62mm						SERIES No.			NO OF PINS TOTAL (02-24P)			O: ORANGE			A: TRAY B: BAG				

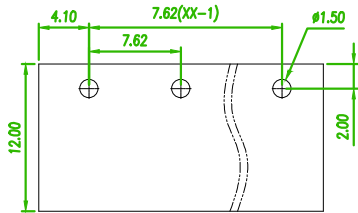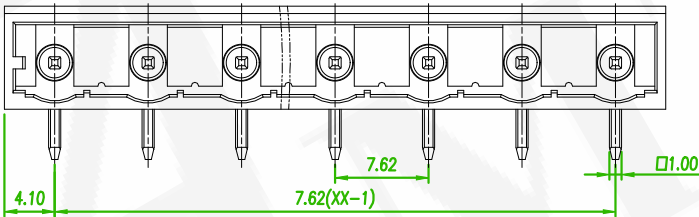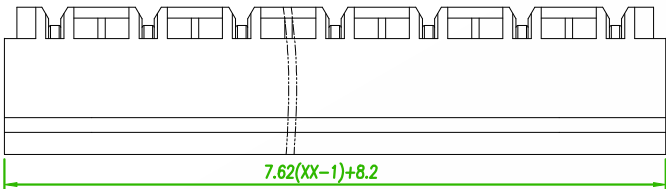

RECOMMENDED PCB LAOUT
(PCB TOLERANCE ±0.05)



linear dimension(Tolerances Standard GB/T 14486-2008)								—	∕	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60
REV.	ECN NO. OR DESCRIPTION							REVISED	DATE	
	ECN NO:240348 Revise the drawing							Gaby	2024/11/27	
	ECN NO:200718 Revise the Tolerance							Alice	2020/11/05	



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	TERMINAL BLOCK MCS 7.62mm DIP R/A TYPE				頁數 Page	1/1
品號 PART NO.	5TM762R-W02NXXXLX-01				繪圖 DRAWN	Benson 2020/02/03
圖號 DRAWING NO.	GN011-BS802	版本 REV.	C	核對 CHECKED	JOSH 2020/02/03	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	JOSH 2020/02/03	
公差 TOLERANCE		單位 UNIT	mm	第三 ANGLE PROJECTION		