

MATERIAL

HOUSING: NYLON66, UL94V-0

COVER: NYLON66, UL94V-0


CAGE: COPPER ALLOY, M3/Ni PLATED

CLAMP: COPPER ALLOY, Ni PLATED

SCREW1: STEEL, M3/Zn PLATED, TORQUE: 0.5N.m

SCREW2: STEEL, M2.5/Zn PLATED

ORDER INFORMATION

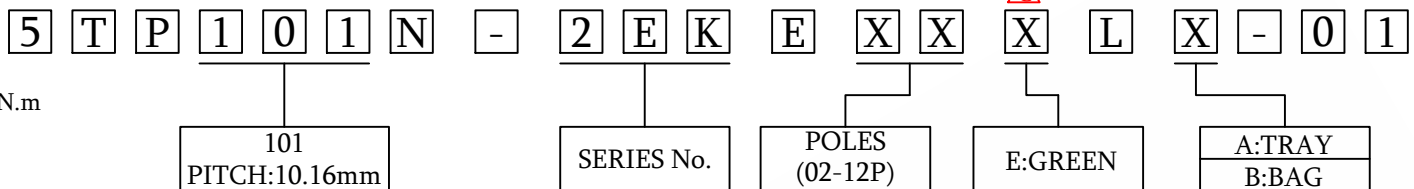

MECHANICAL

OPERATING TEMPERATURE: -40°C~+105°C

STRIPPING LENGTH: 7~8mm


TECHNICAL DATA

UL/CUL

SAFETY APPROVAL			
USE GROUP	B	C	D
RATED VOLTAGE (V)	600	-	600
RATED CURRENT (A)	15	-	5
WIRE RANGE SOLID/STRANDED (AWG)	28-12		
WITHSTANDING VOLTAGE	2200V (1MIN)		

IEC

OVERVOLTAGE CATEGORY	III	III	II
CONTAMINATION CLASS	3	2	2
RATED VOLTAGE (V)	630	1000	1000
RATED CURRENT (A)	10	10	10
IMPULSE WITHSTANDING VOLTAGE (KV)	6.0	6.0	6.0
CONDUCTOR CROSS SECTION SOLID/FLEXIBLE (mm ²)	0.5-2.5		

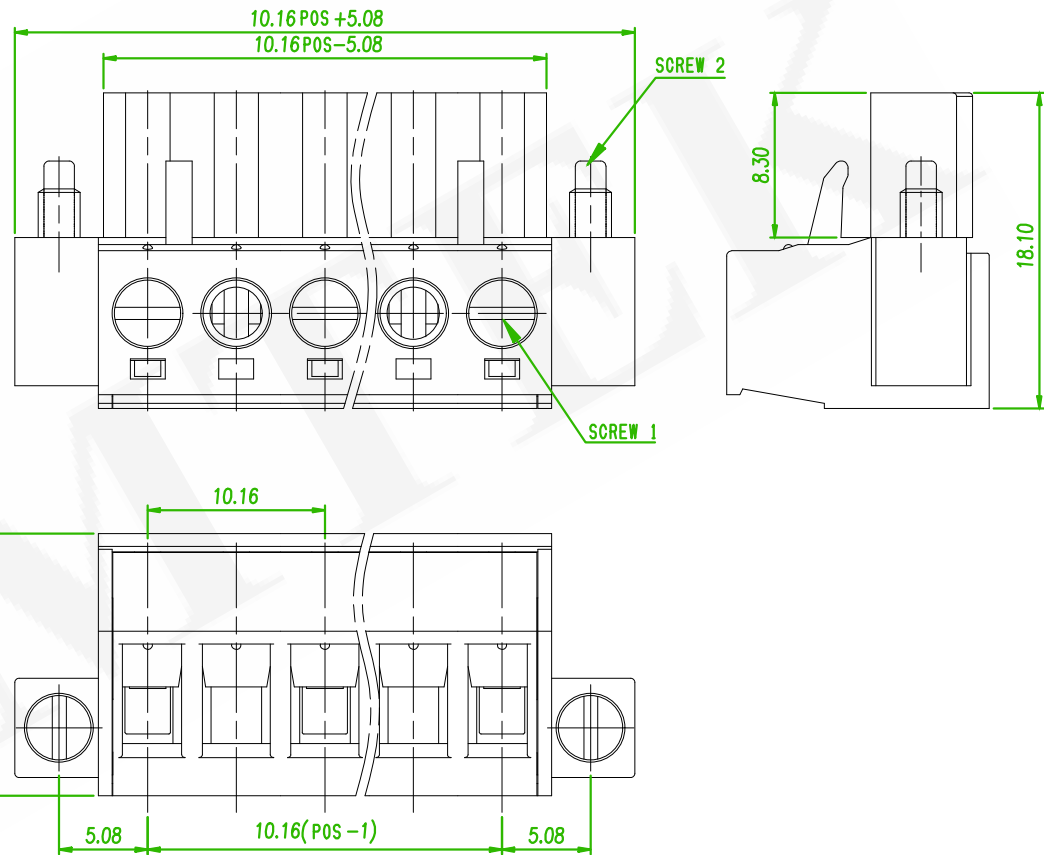

linear dimension (Tolerances Standard GB/T 14486-2008)

variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	over 10 to 100	over 100 to 0.60
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30



ECN NO: 240348 Revise the drawing

Gaby

2024/10/17



ECN NO: 200718 Revise the Dimension

Alice

2020/08/27

REV.

ECN NO. OR DESCRIPTION

REVISED

DATE



糧德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	TERMINAL BLOCK PLUGGABLE 10.16mm				頁數 Page	1/1
品號 PART NO.	5TP101N-2EKEXXXLX-01			繪圖 DRAWN	ERIC 2018/12/17	
圖號 DRAWING NO.	GN011-EA313	版本 REV.	C	核對 CHECKED	JOSH 2018/12/17	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	JASON 2018/12/17	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		