

MECHANICAL

TEMP. RANGE: -40°C ~ +105°C

SOLDERING TEMPERATURE: 260°C/5S

MATERIAL

HOUSING: PA66, UL94V-0

PIN: COPPER ALLOY, Sn PLATED

TECHNICAL DATA

UL/CUL

SAFETY APPROVAL			
USE GROUP	B	C	D
RATED VOLTAGE (V)	150	-	-
RATED CURRENT (A)	5	-	-
WIRE RANGE	-		
SOLID/STRANDED (AWG)	-		
WITHSTANDING VOLTAGE	1300V (1MIN)		

IEC	IEC61984		
OVERVOLTAGE CATEGORY	III	III	II
CONTAMINATION CLASS	3	2	2
RATED VOLTAGE (V)	80	160	320
RATED CURRENT (A)	6	6	6
IMPULSE WITHSTANDING VOLTAGE (KV)	1.5	2.5	2.5
CONDUCTOR CROSS SECTION	-		
SOLID/FLEXIBLE (mm ²)	-		

ORDER INFORMATION

5 T P 2 5 0 R - 5 E C N X X X L X - 0 1







250
PITCH:250mm

SERIES NO.

POLES
(02-24P)

E:GREEN

A:TRAY
B:BAG

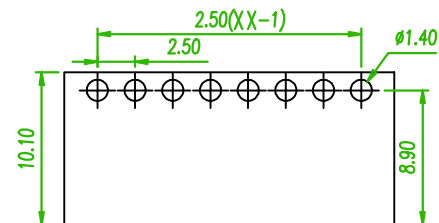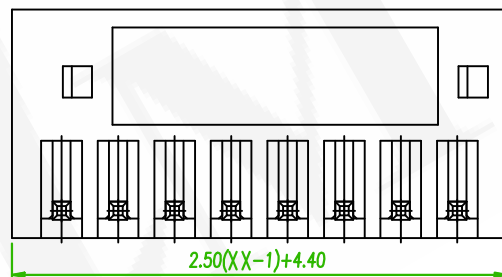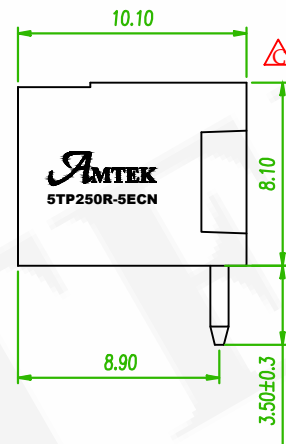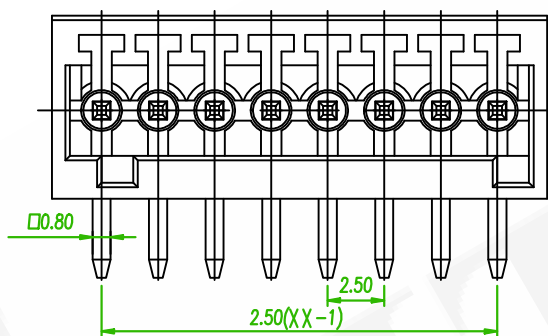

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ±0.05)



linear dimension(Tolerances Standard GB/T 14486-2008)								—	∇	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 250	to 10	over 10 to 100	over 100 to 250
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

REV.	ECN NO.: 240348 Revise the drawing	Gaby	2024/06/19
△x1	ECN NO.:200718 Revise the Dimension	Alice	2020/09/03
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	TERMINAL BLOCK PLUGGABLE 2.5mm DIP R/A TYPE				頁數 Page	1/1
品號 PART NO.	5TP250R-5ECNXXLX-01				繪圖 DRAWN	ERIC 2018/12/13
圖號 DRAWING NO.	GN011-EA282	版本 REV.	D	核對 CHECKED	JOSH 2018/12/13	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	JASON 2018/12/13	
公差 TOLERANCE		單位 UNIT	mm	第三 ANGLE PROJECTION		