

ELECTRICAL

Standard: UL IEC
Voltage Rating: 150V 250V
Current Rating: 5A 6A
Contact Resistance: 20mΩ
Insulation Resistance: 500MΩ/DC500V
Withstanding Voltage: AC 1250V for one min

MECHANICAL

Temperature Range: -40°C ~ +105°C
Temperature Range: +250°C 5S

MATERIAL

Housing: PA66, UL94V-0
Contact: Copper Alloy, Sn Plated

ORDER INFORMATION

5 T P 2 5 0 S - 1 5 C N X X E L B - 0 1

Series No.

No of Pins
total(02~24P)

E:Green

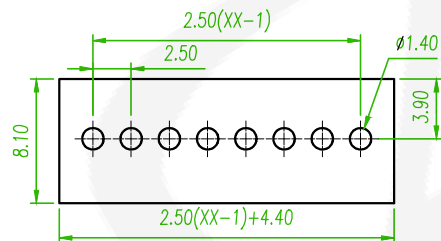

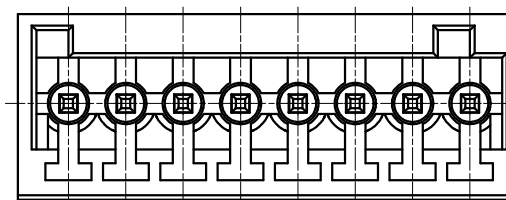
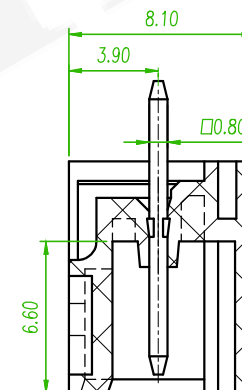
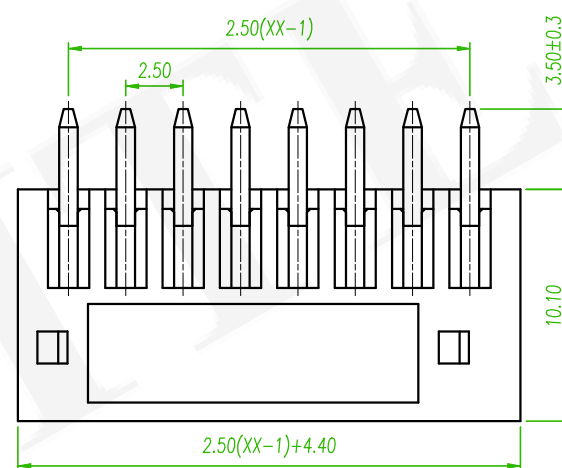
B:Bag



AMTEK 糧德

2020.09.04

Released DCC

P.C.B. LAYOUT

linear dimension(Tolerances Standard GB/T 14486-2008)



variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

REV.1

ECN NO:200718 Revise the Dimension

Alice

2020/09/03

ECN NO. OR DESCRIPTION

REVISED

DATE



糧德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名
TITLE

2.5mm Terminal Block

頁數
Page

1/1

品號
PART NO.

5TP250S-15CNXXELB-01

繪圖
DRAWNMia
2018/08/15圖號
DRAWING NO.

GN011-MD390

版本
REV.

B

核對
CHECKEDJosh
2018/08/15客戶品號
CUSTOMER P/N比例
SCALE

None

承認
APPROVEDJason
2018/08/15公差
TOLERANCE單位
UNIT

mm

THIRD
ANGLE
PROJECTION