

HOUSING: NYLON66, UL94V-0
PIN: COPPER ALLOY, Sn PLATED

5 T P 3 5 0 L - 5 E L N X X X L X - 0 1

350:
PITCH3.50mm

SERIES NO.

NO OF POLES TOTAL
(02~24)

E:GREEN

B:BAG






OPERATING TEMPERATURE:-40°C~+105°C
SOLDERING TEMPERATURE:260°C/5S

TECHNICAL DATA

SAFETY APPROVAL			
USE GROUP	B	C	D
RATED VOLTAGE (V)	300	-	300
RATED CURRENT (A)	8	-	8
WIRE RANGE SOLID/STRANDED (AWG)	-		
WITHSTANDING VOLTAGE	1600V (1MIN)		

IEC	IEC 61984		
OVERVOLTAGE CATEGORY	III	III	II
CONTAMINATION CLASS	3	2	2
RATED VOLTAGE (V)	160	160	320
RATED CURRENT (A)	7	7	7
IMPULSE WITHSTANDING VOLTAGE (KV)	2.5	2.5	2.5
CONDUCTOR CROSS SECTION SOLID/FLEXIBLE (mm ²)	-		

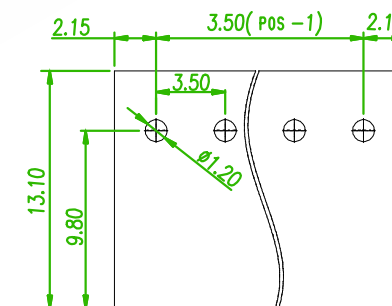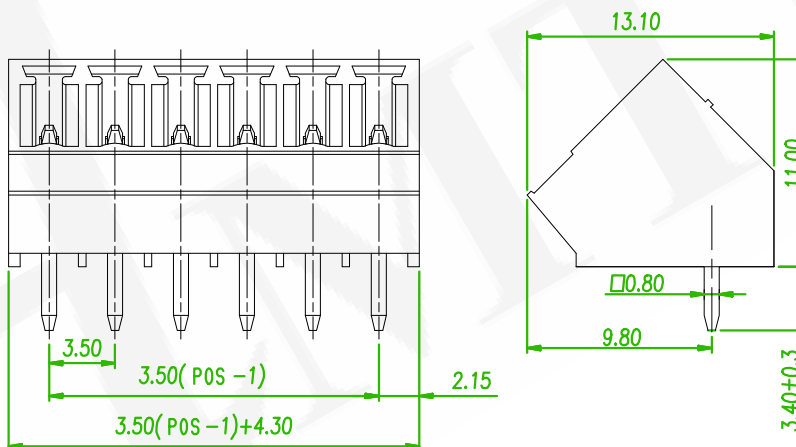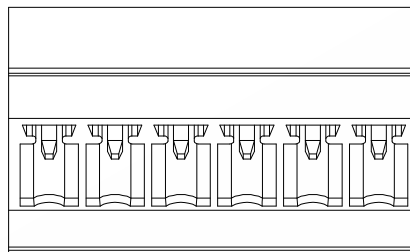

RECOMMENDED PCB LAOUT
(PCB TOLERANCE ± 0.05)

linear dimension(Tolerances Standard GB/T 14486-2008)								—		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

	EasyFlow No.:202401240001	Gaby	2024/07/08
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	TERMINAL BLOCK PLUGGABLE 3.50mm DIP ANGLED TYPE				頁數 Page	1/1
品號 PART NO.	5TP350L-5ELNXXXLX-01			繪圖 DRAWN	RANDY 2024/07/08	
圖號 DRAWING NO.	GN011-JH017	版本 REV.	A	核對 CHECKED	JOSH 2024/07/08	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	JOSH 2024/07/08	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		