

MECHANICAL

TEMP. RANGE: -40°C ~ +105°C

STEIP LENGTH: 10-11mm

MATERIAL

HOUSING: NYLON66, UL94V-0

COVER: NYLON66, UL94V-0

SPRING: STAINLESS STEEL

CLAMP: COPPER ALLOY,Sn PLATED

BUTTON: NYLON66, UL94V-0

SCREW: STEEL,M2,Zn PLATED

TECHNICAL DATA

UL/CUL

SAFETY APPROVAL			
USE GROUP	B	C	D
RATED VOLTAGE (V)	300	50	300
RATED CURRENT (A)	9.5	9.5	9.5
WIRE RANGE	26-16		
SOLID/STRANDED (AWG)			
WITHSTANDING VOLTAGE	1600V (1MIN)		
IEC			
OVERVOLTAGE CATEGORY	III	III	II
CONTAMINATION CLASS	3	2	2
RATED VOLTAGE (V)	160	160	320
RATED CURRENT (A)	13.4	13.4	13.4
IMPULSE WITHSTANDING VOLTAGE (KV)	2.5	2.5	2.5
CONDUCTOR CROSS SECTION	0.2-1.5		
SOLID/FLEXIBLE (mm²)			

ORDER INFORMATION




5 T P 3 5 0 N - 5 H B E X X X L X - 0 1

SERIES NO.

NO.OF PIN
TOTAL (04-48P)

E:GREEN

B:BAG

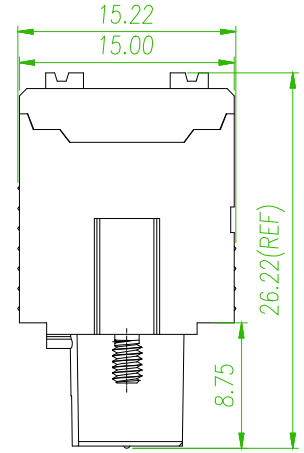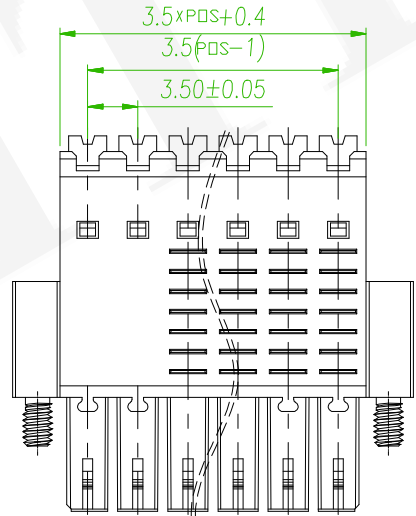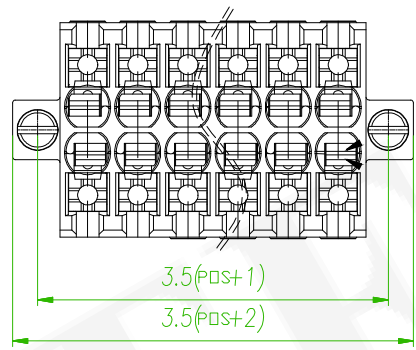

linear dimension(Tolerances Standard GB/T 14486-2008)										—		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	over 10 to 100	over 100 to 100			
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60		
	BPM 202401240001										Gaby	2024/05/21
REV.	ECN NO. OR DESCRIPTION										REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	TERMINAL BLOCK PLUGGABLE 3.5mm				頁數 Page	1/1
	品號 PART NO.	5TP350N-5HBEXXXLX-01			繪圖 DRAWN	Gaby	
	圖號 DRAWING NO.	GN011-GY695		版本 REV.	A	核對 CHECKED	Josh
	客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Josh
	公差 TOLERANCE			單位 UNIT	mm	THIRD ANGLE PROJECTION	