

MECHANICAL

TEMP. RANGE: -40°C ~ +105°C
STEIP LENGTH: 10-11mm

MATERIAL

HOUSING: PA, UL94V-0
CONTACT: COPPER ALLOY, Sn PLATED

TECHNICAL DATA

UL/CUL

SAFETY APPROVAL			
USE GROUP	B	C	D
RATED VOLTAGE (V)	300	50	300
RATED CURRENT (A)	9.5	9.5	9.5
WIRE RANGE	26-16		
SOLID/STRANDED (AWG)			
WITHSTANDING VOLTAGE	1600V (1MIN)		

IEC	IEC61984		
OVERVOLTAGE CATEGORY	III	III	II
CONTAMINATION CLASS	3	2	2
RATED VOLTAGE (V)	160	160	320
RATED CURRENT (A)	13.4	13.4	13.4
IMPULSE WITHSTANDING VOLTAGE (KV)	2.5	2.5	2.5
CONDUCTOR CROSS SECTION	0.2-1.5		
SOLID/FLEXIBLE (mm ²)			

linear dimension(Tolerances Standard GB/T 14486-2008)								—	∇	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

	ECN NO.240348 revise the drawing	Gaby	2024/12/24
	BPM 20241107003	Gaby	2024/11/07
	BPM 20241028001	Alice	2024/10/28
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

ORDER INFORMATION

5 T P 3 5 0 N - 5 H B N X X X L X - 0 1




350
PITCH:3.50mm

SERIES NO.

NO.OF POLES TOTAL
(04-48P)

O:ORANGE
◎E:GREEN
U:BLUE
B:BLACK

B:BAG
A:TRAY, W/O CAP

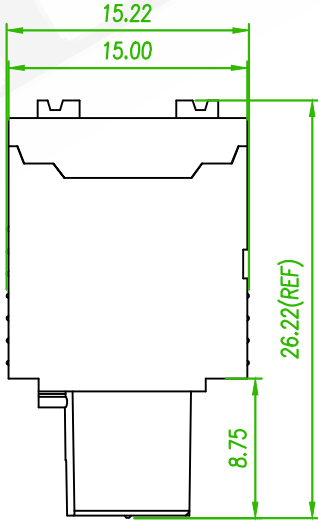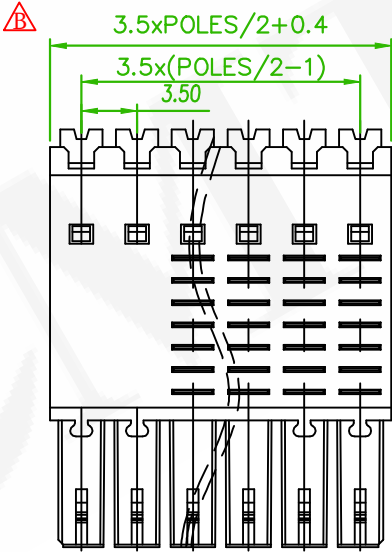

品名 TITLE	TERMINAL BLOCK PLUGGABLE 3.5mm				頁數 Page	1/1
品號 PART NO.	5TP350N-5HBNXXXLX-01				繪圖 DRAWN	Alice
圖號 DRAWING NO.	GN011-AB691	版本 REV.	E	核對 CHECKED	JOSH 2022/09/27	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	JOSH 2022/09/27	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		