

Electrical

Standard: UL IEC
Rated Voltage: 300V 130V
Rated Current: 8A 10A
Contact resistance:20mΩ
Insulation resistance:5000MΩ
Wire Range: 28-16AWG 1.5mm²
Withstanding Voltage: AC 2000V for one minent

Mechanical

Temp. Range: -40°C ~ +105°C
Torque:0.2Nm(1.7lb.in)

Material

Housing: Nylon 66, UL94V-0
Pin Header: Brass, Tin Plated
Screw:M2,Steel,Zinc Plated
Wire guard:Phosphor Bronze,Ni Plated
Clamp:Brass,Ni Plated

Dimensions

Pitch: 3.5mm
Poles: 2P-24P

ORDER INFORMATION

5 T P 3 5 0 N - 5 K 3 N X X X L B - 0 1

350:
Pitch 3.50mm



AMTEK 糧德
2021.05.21
Released DCC

Series No.


No of Pins total
(02~24)

G:Gray	O:Orange
U:Blue	R:Red
B:Black	T:Trans-parent
E:Green	N:Brown
	W:White

B:Bag

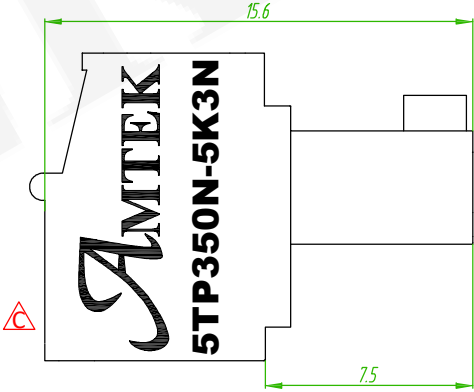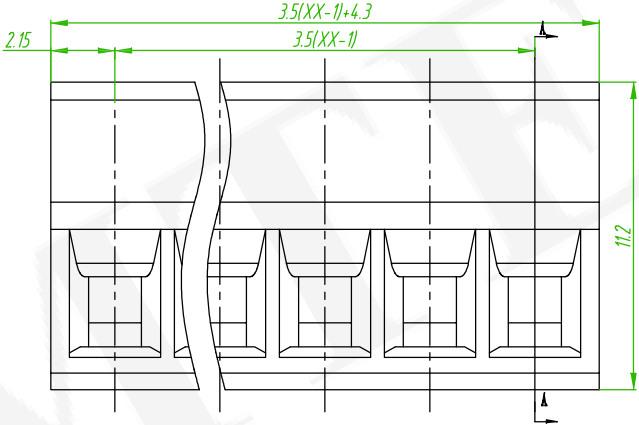

SECTION A-A



linear dimension(Tolerances Standard GB/T 14486-2008)								—	□	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60
ECN NO:210508 Add the LOGO								Benson	2021/05/18	
ECN NO:200718 Revise the Dimension								Alice	2020/09/04	
REV.	ECN NO. OR DESCRIPTION							REVISED	DATE	

AMTEK
糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	Terminal Block				頁數 Page	1/1
品號 PART NO.	5TP350N-5K3NXXXXLB-01				繪圖 DRAWN	Mia 2016/08/24
圖號 DRAWING NO.	GN011-AL291	版本 REV.	C	核對 CHECKED	Jonny 2016/08/24	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/08/24	
公差 TOLERANCE	.X ±0.20 .XX ±0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION		

Old Part No. :TB15EK-3.5-XXP-1X-00A-L