

ORDER INFORMATION

Electrical

Standard: UL IEC
Rated Voltage: 300V 250V
Rated Current: 8A 10A
Contact Resistance: 20mΩ
Insulation Resistance: 500MΩ / DC 500V
Withstanding Voltage: AC 2000V for one min
Wire Range: 24-16AWG

Mechanical






Temp. Range: -40°C ~ +105°C
Strip length: 9-10mm

Dimensions

Pitch: 3.5mm
Poles: 2P-24P

Material

Housing: PA66, UL94V-2
Clamp: Copper Alloy, Tin plated
Shrapnel: stainless steel

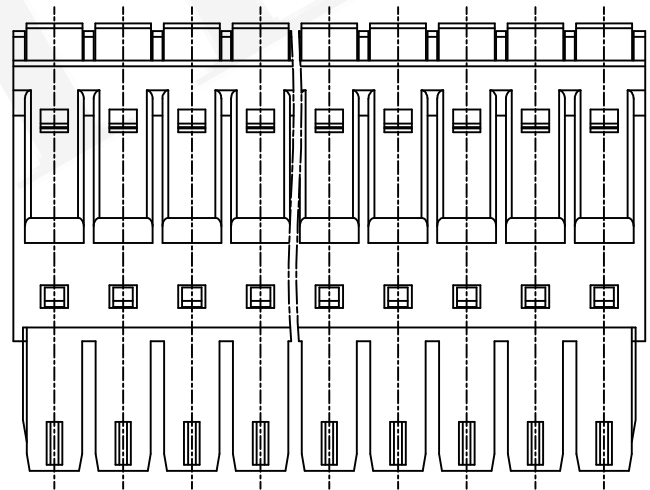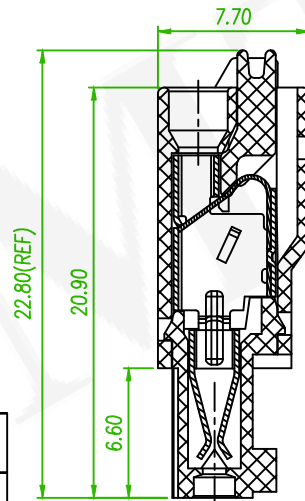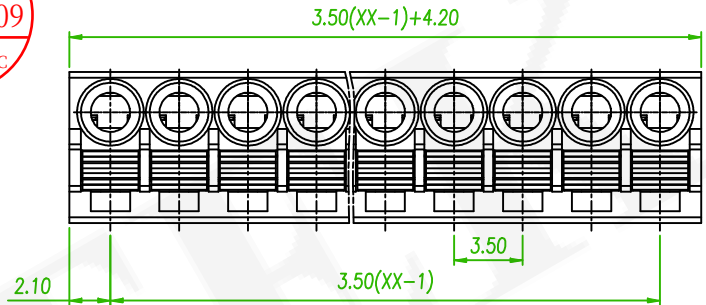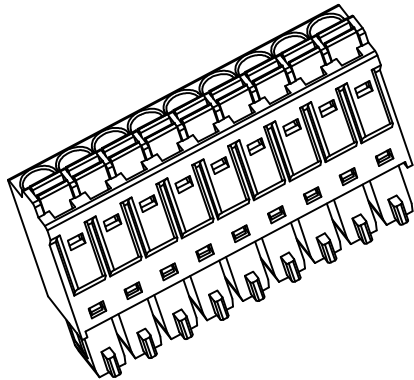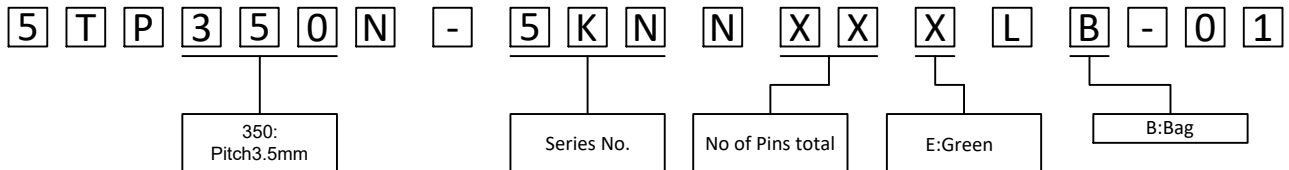

linear dimension (Tolerances Standard GB/T 14486-2008)



variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60



Add the color Options

Alice

2021/08/09



ECN NO: 200718 Revise the Dimension

Alice

2020/09/04

REV.

ECN NO. OR DESCRIPTION

REVISED

DATE



糧德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	Terminal Block				頁數 Page	1/1
品號 PART NO.	△ 5TP350N-5KNNXXXLB-01				繪圖 DRAWN	Mia 2016/06/21
圖號 DRAWING NO.	GN011-AL290	版本 REV.	C	核對 CHECKED	承認 APPROVED	Wanling 2016/06/21
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	承認 APPROVED	John 2016/06/21
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		