


HOUSING: PA66,UL94V-0
CONTACTOR: COPPER ALLOY,TIN PLATED
SPECIFICATION
OPERATING TEMPERATURE: -40°C~130°C

UL/CUL

SAFETY APPROVAL			
USE GROUP	B	C	D
RATED VOLTAGE (V)	150	-	-
RATED CURRENT (A)	7	-	-
WITHSTANDING VOLTAGE	1300V (1MIN)		

IEC61984

OVERVOLTAGE CATEGORY	III	II	I
CONTAMINATION CLASS	3	2	2
RATED VOLTAGE (V)	80	125	250
RATED CURRENT (A)	10	10	10
IMPULSE WITHSTANDING VOLTAGE (KV)	2.5	2.5	2.5

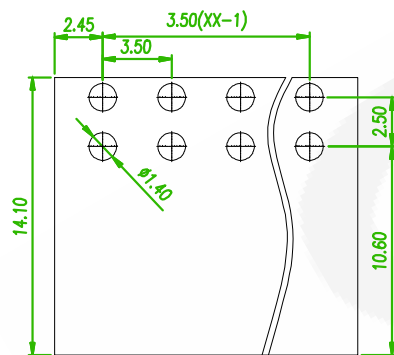

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ± 0.05)

5 T P 3 5 0 R - 1 5 E N X X X L X - 0 1


350:
PITCH3.50mm

SERIES NO.

NO OF POLES TOTAL
(04~48P)

O:ORANGE

B:BAG

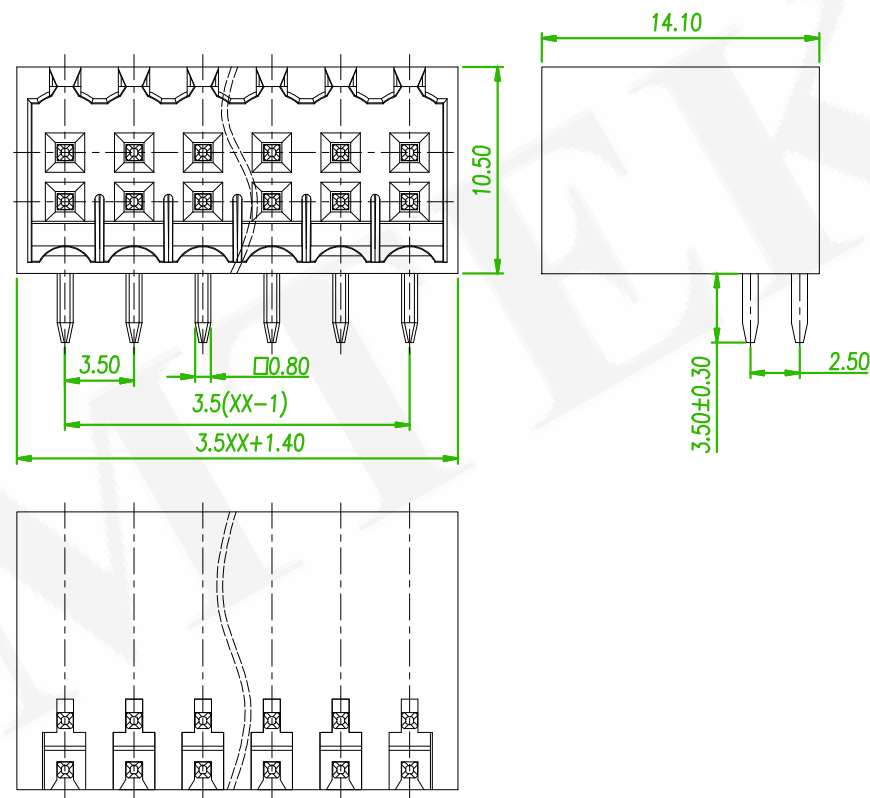

linear dimension(Tolerances Standard GB/T 14486-2008)								—		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

	ECN-202509072	Oliver	2025/10/09
	BPM 2024120601	Benson	2024/12/06
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	TERMINAL BLOCK PLUGGABLE 3.5mm DIP R/A TYPE				頁數 Page	1/1
品號 PART NO.	5TP350R-15ENXXXLX-01			繪圖 DRAWN	Alice 2022/09/27	
圖號 DRAWING NO.	GN011-AB690	版本 REV.	C	核對 CHECKED	Josh 2022/09/27	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2022/09/27	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		