

ELECTRICAL

STANDARD: UL IEC
RATED VOLTAGE: 150V 250V
RATED CURRENT: 7A 10A
WITHSTANDING VOLTAGE: AC 1300V FOR ONE MIN

ORDER INFORMATION

5TP350R-15ENXXUX-01

SERIES NO.

NO. OF PIN
TOTAL (04-48P)

B:BLACK



A:TRAY

MECHANICAL

TEMP. RANGE: -40°C ~ +130°C

MATERIAL

HOUSING: LCP, UL94V-0
CONTACT: COPPER ALLOY, SN PLATED

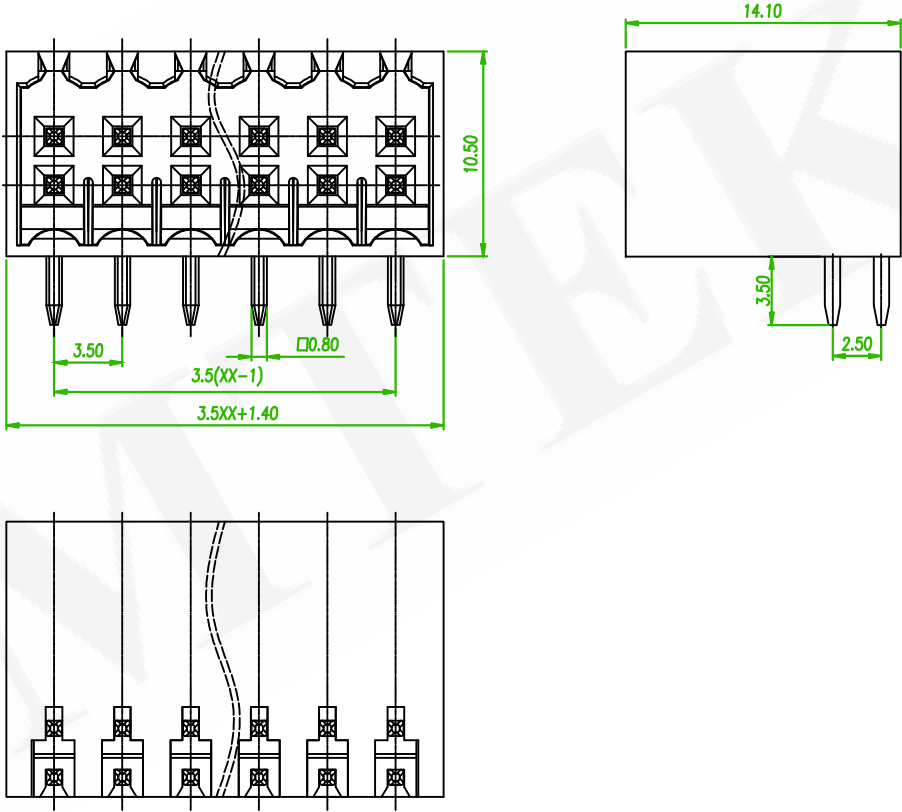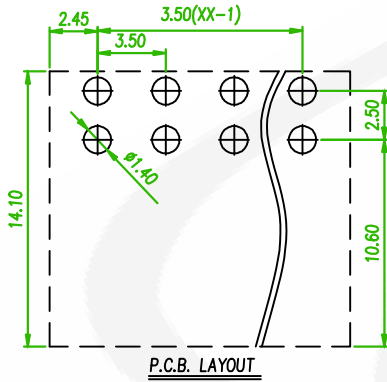

linear dimension(Tolerances Standard GB/T 14486-2008)								—	□	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

REV.	BPM 2024120601 ECN NO. OR DESCRIPTION	Benson	2024/12/06
		REVISED	DATE

 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	TERMINAL BLOCK PLUGGABLE 3.5MM DIP R/A TYPE				頁數 Page	1/1
	品號 PART NO.	5TP350R-15ENXXXUX-01				繪圖 DRAWN	Alice 2022/09/27
	圖號 DRAWING NO.		版本 REV.	B	核對 CHECKED	JOSH 2022/09/27	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	JOSH 2022/09/27	
	公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		