

HOUSING: LCP, UL94V-0
PIN: COPPER ALLOY, SN PLATED

5 T P 3 5 0 R - E H 3 N X X X U X - 0 2

Released DCC

OPERATING TEMPERATURE: -40°C ~ +130°C
SOLDERING TEMPERATURE: 260°C/10S

350:
PITCH3.50mm

SERIES NO.

NO OF POLES TOTAL (06-72)	
------------------------------	--



B:BLACK

X:BOX

UL/CUL

SAFETY APPROVAL				
USE GROUP	B	C	D	
RATED VOLTAGE (V)	300	-	-	
RATED CURRENT (A)	8	-	-	
WITHSTANDING VOLTAGE	1600V (1MIN)			
IEC		IEC61984-1		
OVERVOLTAGE CATEGORY	III	III	II	
CONTAMINATION CLASS	3	2	2	
RATED VOLTAGE (V)	160	160	160	
RATED CURRENT (A)	8	8	8	
IMPULSE WITHSTANDING VOLTAGE (KV)	2.5	2.5	2.5	

SMYBOL "02" MEANS SERIAL AS ORDER INFORMATION SHOWN

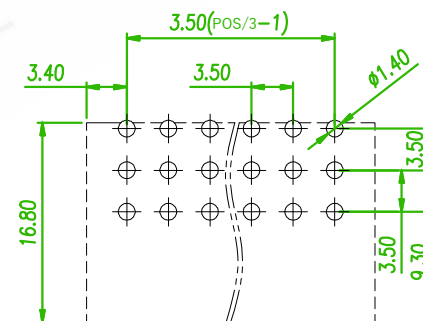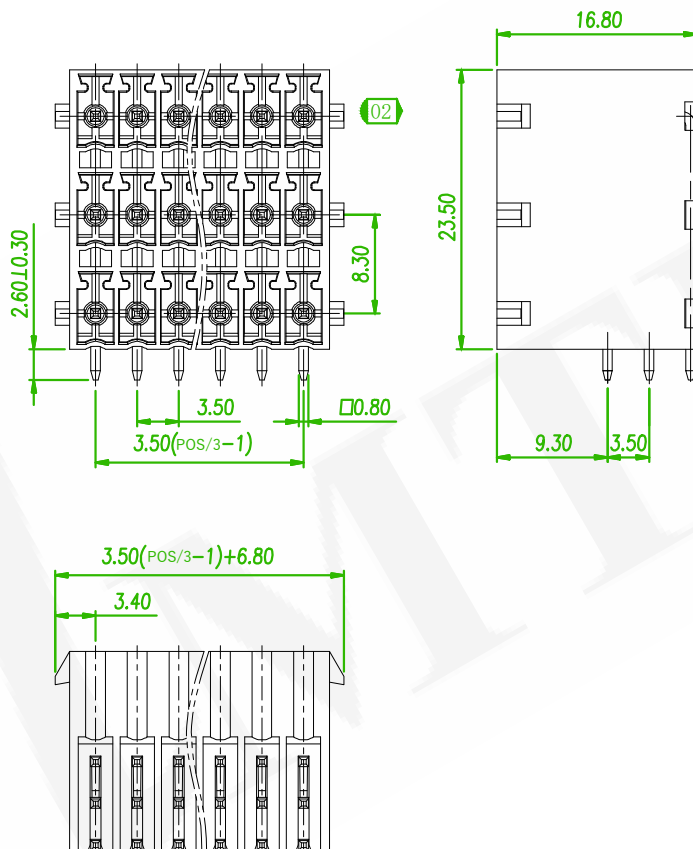

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ± 0.05)

General Tolerances										
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

	BPM NO.:202401240001	Randy	2024/06/17
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	TERMINAL BLOCK PLUGGABLE 3.50mm DIP R/A TYPE				頁數 Page	1/1
品號 PART NO.	5TP350R-EH3NXXXUX-02			繪圖 DRAWN	RANDY 2024/06/17	
圖號 DRAWING NO.	GN011-RD558	版本 REV.	A	核對 CHECKED	JOSH 2024/06/17	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	JOSH 2024/06/17	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		