

MATERIAL

HOUSING: PA66,UL94V-0
CONTACTOR: COPPER ALLOY,TIN PLATED

SPECIFICATION

OPERATING TEMPERATURE: -40°C~105°C
SOLDERING TEMPERATURE: 260°C/5SEC

TECHNICAL DATA

UL/CUL UL 1059

USE GROUP	B	C	D
RATED VOLTAGE (V)	150	-	-
RATED CURRENT (A)	7	-	-
WITHSTANDING VOLTAGE	1300V (1MIN)		

IEC IEC61984





OVERVOLTAGE CATEGORY	III	III	II
CONTAMINATION CLASS	3	2	2
RATED VOLTAGE (V)	80	125	250
RATED CURRENT (A)	10	10	10
IMPULSE WITHSTANDING VOLTAGE (KV)	2.5	2.5	2.5

NOTE

SYMBOL "02" MEANS SERIAL AS ORDER INFORMATION SHOWN

ORDER INFORMATION

5	T	P	3	5	0	S	-	1	5	E	N	X	X	X	L	X	-	0	2
350: PITCH3.50mm							SERIES NO.			NO OF POLES TOTAL (04~48P)			O:ORANGE			B:BAG			

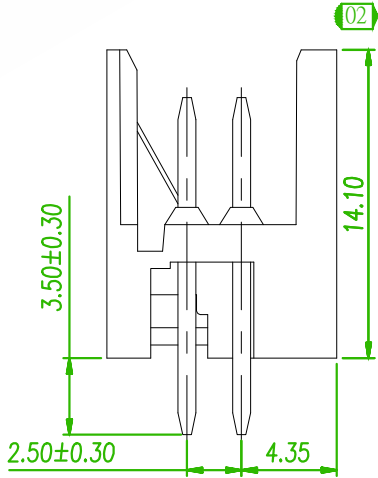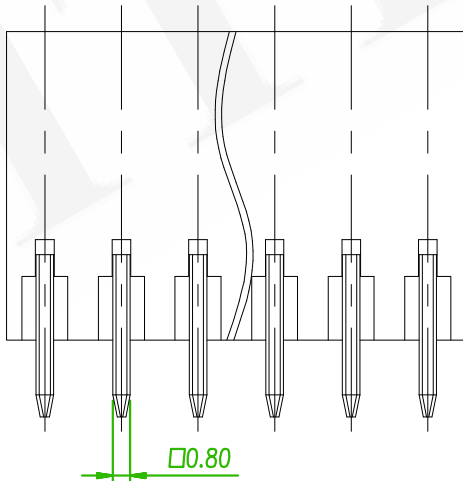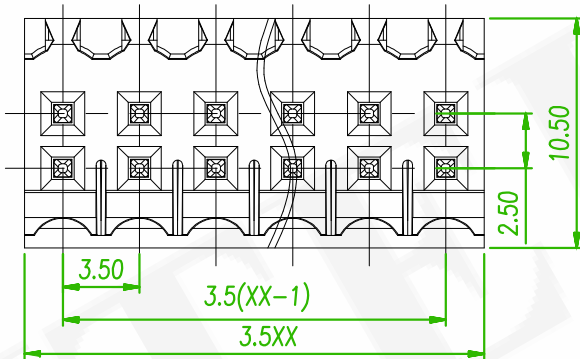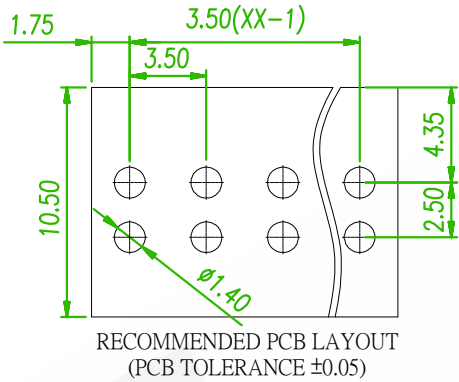

linear dimension(Tolerances Standard GB/T 14486-2008)								—	∕	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 250	to 10	over 10 to 100	over 100 to 250
tolerance	+0.20	+0.30	+0.50	+0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
△	ECN-202509072	Oliver	2025/10/08
△	EASYFLOW NO.202401240001	Randy	2024/05/24

 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	TERMINAL BLOCK PLUGGABLE 3.5mm DIP V/T TYPE				頁數 Page	1/1
	品號 PART NO.	5TP350S-15ENXXXLX-02				繪圖 DRAWN	Randy 2024/05/24
	圖號 DRAWING NO.	GN011-RL966	版本 REV.	B	核對 CHECKED	Josh 2024/05/24	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2024/05/24	
	公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		