

ELECTRICAL

Standard: UL IEC
 Rated Voltage: 300V 160V
 Rated Current: 8A 8A

Withstanding Voltage: AC 1600V for one min

MECHANICAL

Temp. Range: -40°C ~ +130°C

MATERIAL

Housing: LCP, UL94V-0

Pin Header: Copper alloy, Sn plated


ORDER INFORMATION

5 T P 3 5 0 S - 5 E C N X X B U X - 0 1



Series No.	N:W/O Ear	No of Poles (02-24P)	B:Black	U:LCP+ROHS
------------	-----------	-------------------------	---------	------------



B:Bag
 A:Tray w/o cap
 R:T/R with cap

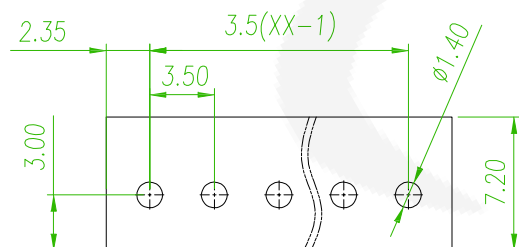


P.C.B. LAYOUT

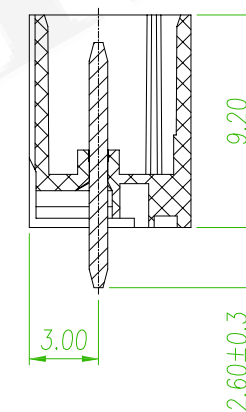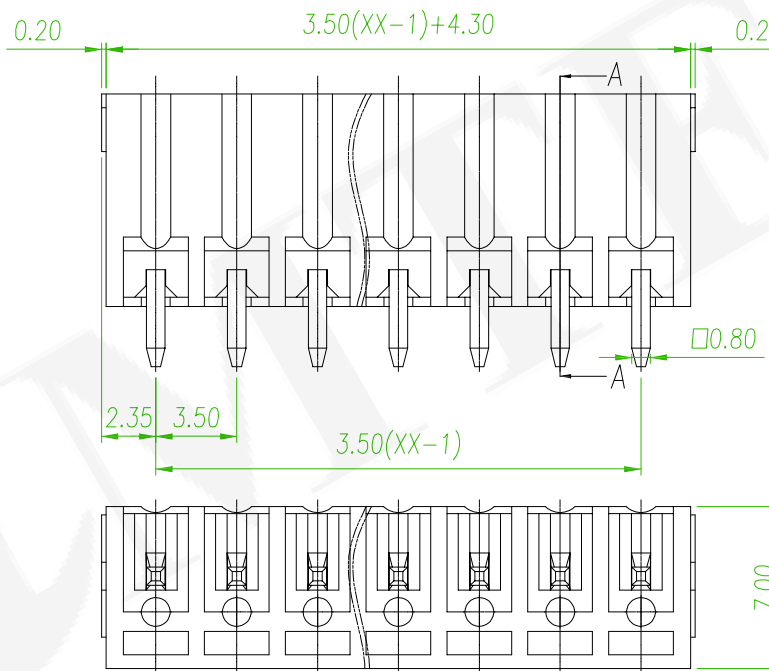

SECTION:A-A

linear dimension(Tolerances Standard GB/T 14486-2008)



variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
 Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
 FAX: 886-2-2260-8030

品名 TITLE	3.5mm TERMINAL BLOCK				頁數 Page	1/1
品號 PART NO.	5TP350S-5ECNXXBUX-01				繪圖 DRAWN	Benson 2020/03/23
圖號 DRAWING NO.	GN011-BS949	版本 REV.	A	核對 CHECKED	Josh 2020/03/23	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2020/03/23	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		