

SPECIFICATION

OPERATING TEMPERATURE: -30°C~120°C

MATERIAL

HOUSING: PBT,UL94V-0

CONTACTOR: COPPER ALLOY,TIN PLATED

TECHNICAL DATA

UL/CUL

UL1059

USE GROUP	B	C	D
RATED VOLTAGE (V)	300	-	-
RATED CURRENT (A)	8	-	-
WITHSTANDING VOLTAGE	1600V (1MIN)		

IEC

IEC61984

OVERVOLTAGE CATEGORY	III	III	II
CONTAMINATION CLASS	3	2	2
RATED VOLTAGE (V)	160	160	160
RATED CURRENT (A)	8	8	8
IMPULSE WITHSTANDING VOLTAGE (KV)	2.5	2.5	2.5

NOTE

SYMBOL "02" MEANS SERIAL AS ORDER INFORMATION SHOWN

ORDER INFORMATION

5 T P 3 5 0 S - E H 3 N X X X L X - 0 2





350:
PITCH3.50mm

SERIES NO.

NO OF PINS TOTAL
(06-72)

E:GREEN

X:BOX

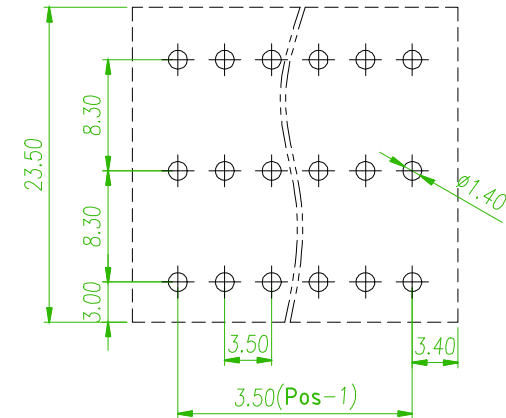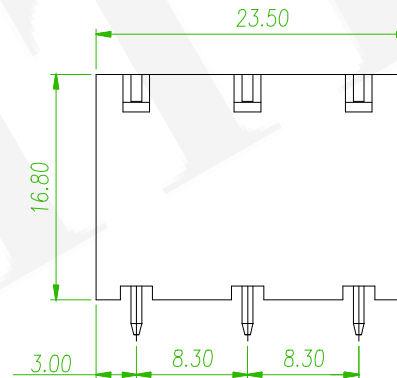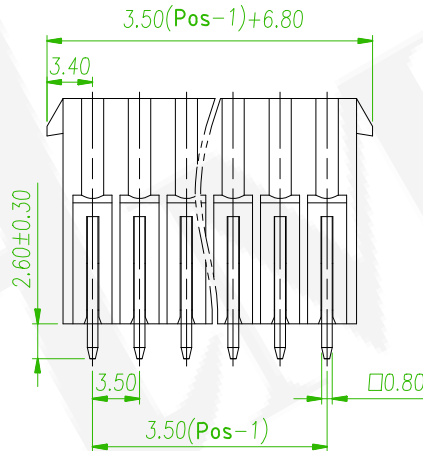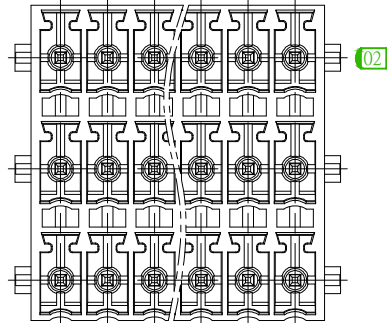

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ±0.05)

linear dimension(Tolerances Standard GB/T 14486-2008)								—	∇	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	+0.20	+0.30	+0.50	+0.70	±1.00	+1.30	+1.60	0.10	0.30	0.60

REV.	EasyFlow No.:202401240001	Randy	2024/05/29
	ECN NO. OR DESCRIPTION	REVISED	DATE


糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	TERMINAL BLOCK PLUGGABLE 3.50mm DIP V/T TYPE				頁數 Page	1/1
品號 PART NO.	5TP350S-EH3NXXXLX-02			繪圖 DRAWN	Randy 2024/05/29	
圖號 DRAWING NO.	GN011-RD538	版本 REV.	A	核對 CHECKED	Josh 2024/05/29	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2024/05/29	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		