

MATERIAL 
HOUSING: NYLON66, UL94V-0
PIN: COPPER ALLOY, Sn PLATED
NUT: COPPER ALLOY, M2.5

MECHANICAL
OPERATING TEMPERATURE: -40°C~+105°C
SOLDERING TEMPERATURE: 260°C/5S




TECHNICAL DATA
UL/CUL

SAFETY APPROVAL			
USE GROUP	B	C	D
RATED VOLTAGE (V)	300	-	300
RATED CURRENT (A)	8	-	8
WIRE RANGE			
SOLID/STRANDED (AWG)	-		
WITHSTANDING VOLTAGE	1600V (1MIN)		

IEC

SAFETY APPROVAL			
OVERVOLTAGE CATEGORY	III	III	II
CONTAMINATION CLASS	3	2	2
RATED VOLTAGE (V)	160	160	250
RATED CURRENT (A)	7	7	7
IMPULSE WITHSTANDING VOLTAGE (KV)	2.5	2.5	2.5
CONDUCTOR CROSS SECTION SOLID/FLEXIBLE (mm²)	-		

ORDER INFORMATION

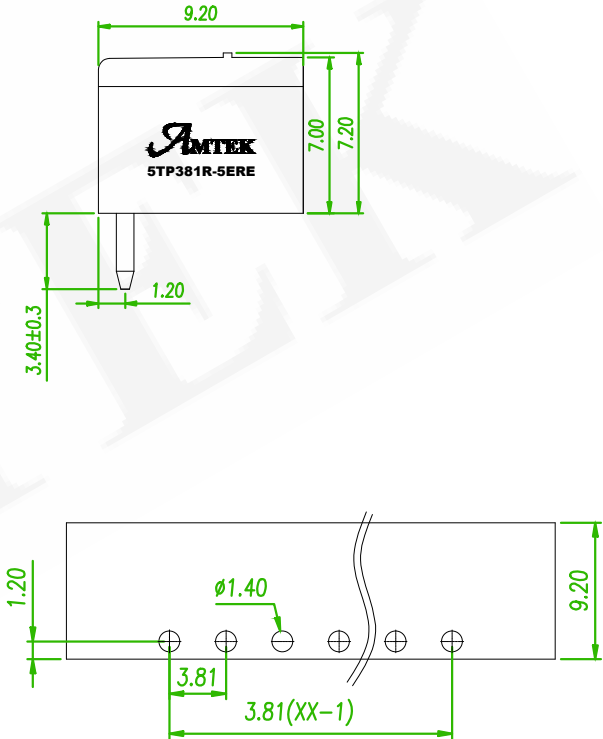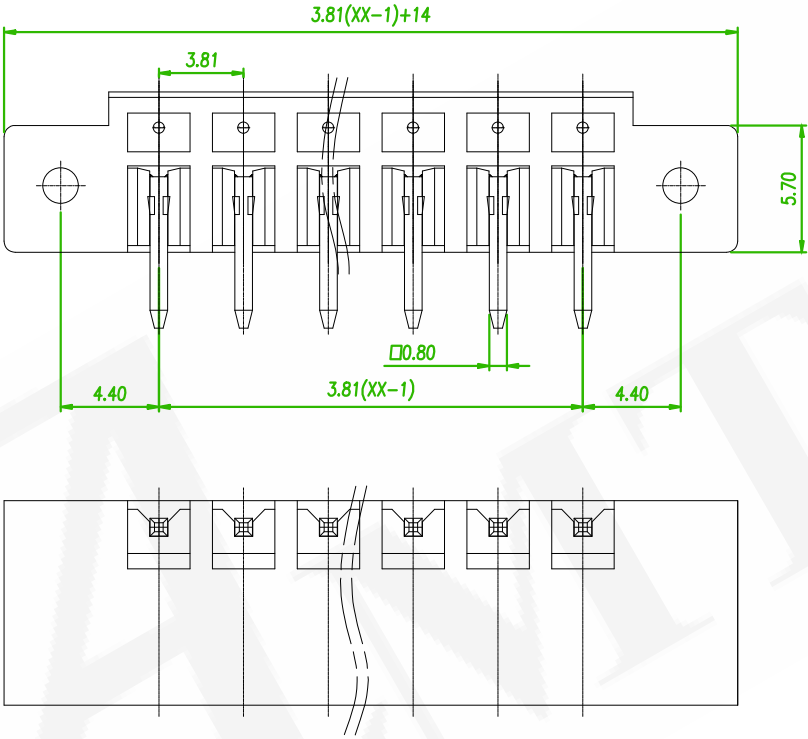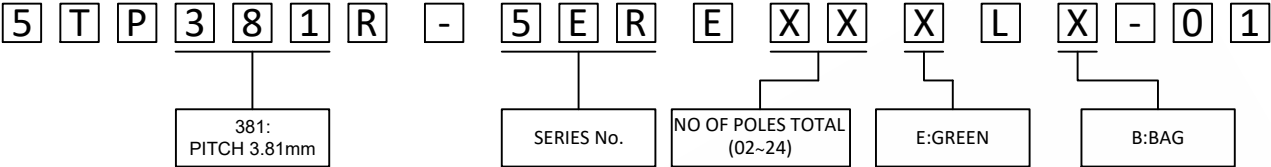

linear dimension(Tolerances Standard GB/T 14486-2008)								—		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 250	to 10	over 10 to 100	over 100 to 250
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

	ECN NO.:240348 Revise the drawing	Gaby	2025/02/11
	Add the Amtek Logo	Benson	2023/06/05
	ECN NO.:200718 Revise the Tolerance	Alice	2020/09/10
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE


糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	TERMINAL BLOCK PLUGGABLE 3.81mm DIP R/A TYPE				頁數 Page	1/1
品號 PART NO.	5TP381R-5EREXXXLX-01				繪圖 DRAWN	MIA 2016/08/05
圖號 DRAWING NO.	GN011-AL343	版本 REV.	D	核對 CHECKED	BORIS 2016/08/05	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	BORIS 2016/08/05	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		