
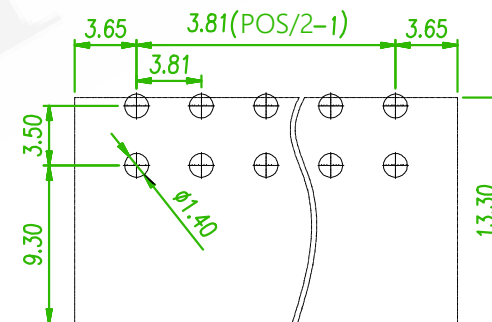


SOLDERING TEMPERATURE: 260°C/5SEC

UL/CUL

IEC	IEC61984		
OVERVOLTAGE CATEGORY	III	III	II
CONTAMINATION CLASS	3	2	2
RATED VOLTAGE (V)	160	160	250
RATED CURRENT (A)	8	8	8
IMPULSE WITHSTANDING VOLTAGE (KV)	2.5	2.5	2.5

X:BOX

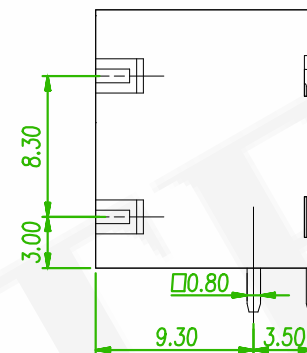

品名 TITLE	TERMINAL BLOCK PLUGGABLE 3.81mm DIP R/A TYPE				頁數 Page	1/1
品號 PART NO.	5TP381R-5HBNXXXUX-01			繪圖 DRAWN	RANDY 2024/05/24	
圖號 DRAWING NO.	GN011-RD522	版本 REV.	A	核對 CHECKED	JOSH 2024/05/24	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	JOSH 2024/05/24	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		