

ORDER INFORMATION

ELECTRICAL

Standard: UL IEC
Rated Voltage: 300V 320V
Rated Current: 10A 10A
Withstanding Voltage: AC 1600V for one minute
Temp.Range:-40°C~+105°C

5 T P 5 0 0 S - 2 E C N X X X L B - 0 1

500:
Pitch5.00mm

Series No.

No of Pins total
(02~24)

G:Gray	O:Orange
U:Blue	R:Red
B:Black	T:Transparent
E:Green	N:Brown
	W:White

B:Bag





L:RoHS + Nylon66
Soldering Temperature:
200 / 230°C / 5~10 Sec
☆Remark
Blank:Non RoHS

MATERIAL

Housing: Nylon66, UL94V-0
Pin header:Copper alloy,Tin plated



AMTEK 耀德
2022.10.03
Released DCC

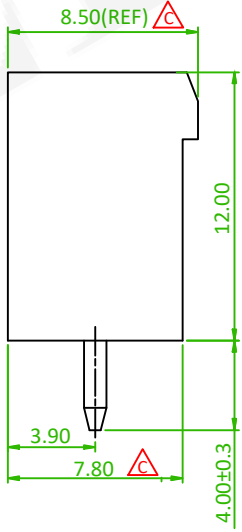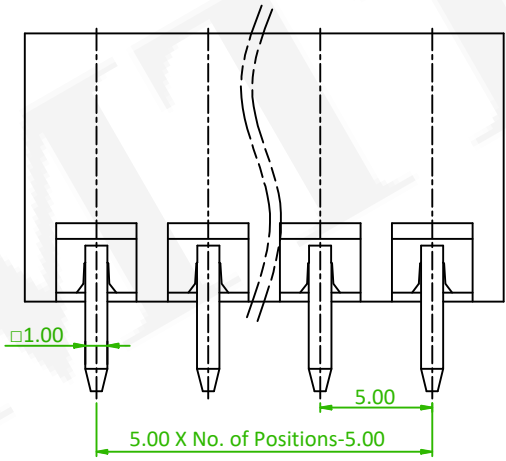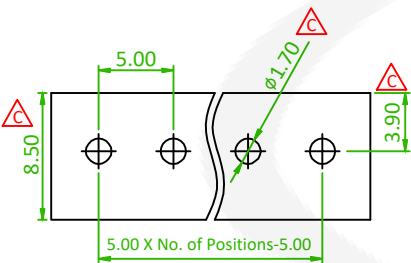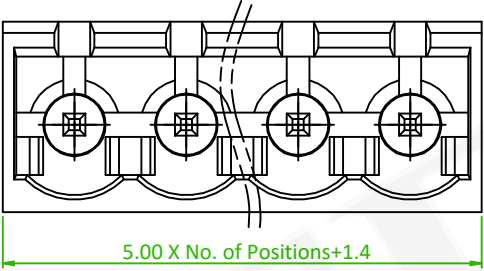

linear dimension(Tolerances Standard GB/T 14486-2008)								—	□	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

△x1	ECN NO:210508 Revise the Drawing	Alice	2022/07/12
△x6	ECN NO.:220417: Revise the Drawing	Alice	2022/05/10
△x1	ECN NO:200718 Revise the Tolerance	Alice	2020/09/16
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

AMTEK 耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	Terminal Block				頁數 Page	1/1
品號 PART NO.	5TP500S-2ECNXXXLB-01				繪圖 DRAWN	Mia 2016/12/21
圖號 DRAWING NO.	GN011-MC159	版本 REV.	D	核對 CHECKED	Jonny 2016/12/21	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/12/21	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		

Old Part No. :TB2EVC-5.0-XXP-1X-00A-L