

ELECTRICAL

Standard: UL IEC
Rated Voltage: 300V 450V
Rated Current: 10A 20A
Contact Resistance: 20mΩ
Withstanding Voltage: AC 2000V for one min
Insulation Resistance: 500MΩ
Wire range: 28-14AWG 2.5mm²

MECHANICAL

Temp. Range: -40°C ~ +105°C
Steip length: 7-8mm

MATERIAL

Housing: PA66, UL94V-0
Screws: M2.5 Steel, Zn plated
Clamp: Copper alloy, Sn plated
Wire guard: Stainless steel

ORDER INFORMATION

5 T P 5 0 8 N - 2 D A E X X E L X - 0 1

Series No.




Poles
(02-24P)

E:Green

A:Tray
B:Bag



AMTEK 糧德
2020.10.13
Released DCC

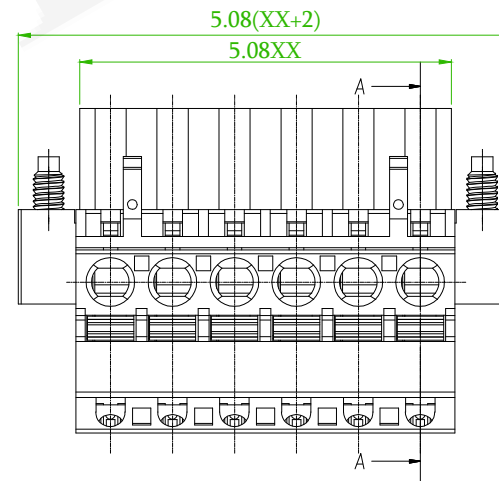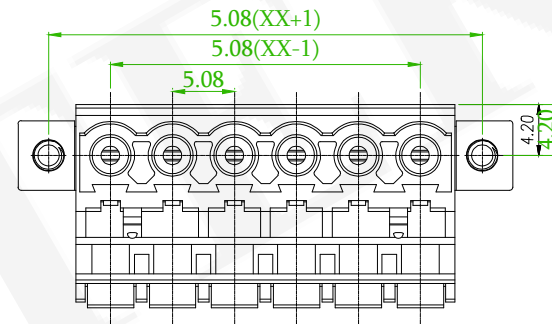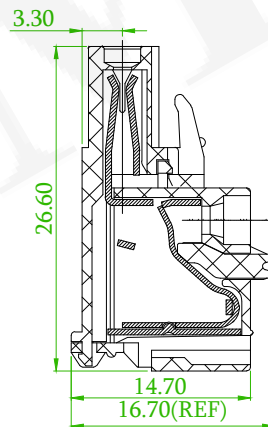

linear dimension(Tolerances Standard GB/T 14486-2008)



variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 1000	to 10	over 10 to 100	over 100 to 1000
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60



ECN NO:200718 Revise the Tolerance

Alice

2020/09/18

REV.

ECN NO. OR DESCRIPTION

REVISED

DATE



糧德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名

TITLE

5.08mm Terminal Block

頁數
Page

1/1

品號

PART NO.

5TP508N-2DAEXXELX-01

繪圖

DRAWN

Eric
2018/12/03

圖號

DRAWING NO.

GN011-EA166

版本

REV.

B

核對

CHECKED

Josh
2018/12/03

客戶品號

CUSTOMER P/N

比例

SCALE

None

承認

APPROVED

Jason
2018/12/03

公差

TOLERANCE

單位

UNIT

mm

THIRD

ANGLE

PROJECTION

