

ORDER INFORMATION

TEMP.RANGE:-40°C~+105°C
STRIPPING LENGTH: 7~8mm

5 T P 5 0 8 N - 2 E K E X X X L X - 0 1

MATERIAL

HOUSING: PA66, UL94V-0
COVER: PA66, UL94V-0
CAGE: COPPER ALLOY,M3/Ni PLATED
CLAMP: COPPER ALLOY,Ni PLATED
SCREW1: STEEL,M3/Zn PLATED,TORQUE: 0.5Nm
SCREW2: STEEL,M2.5/Zn PLATED



SERIES NO.

NO OF PINS
TOTAL(02-24)

E:GREEN

B:BAG

FOR 2PINS ONLY THIS ONE
IS AVAILABLE

TECHNICAL DATA

UL/CUL

SAFETY APPROVAL			
USE GROUP	B	C	D
RATED VOLTAGE (V)	300	-	300
RATED CURRENT (A)	15	-	10
WIRE RANGE SOLID/STRANDED (AWG)	28-12		
WITHSTANDING VOLTAGE	1600V (1MIN)		

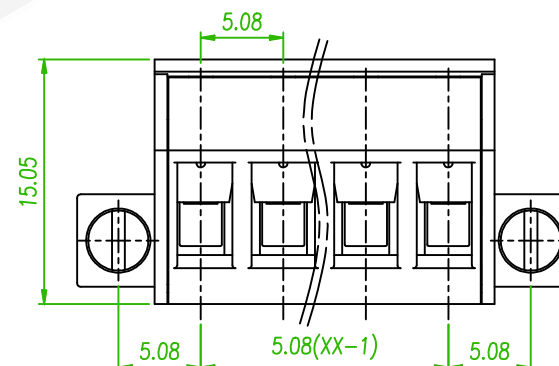
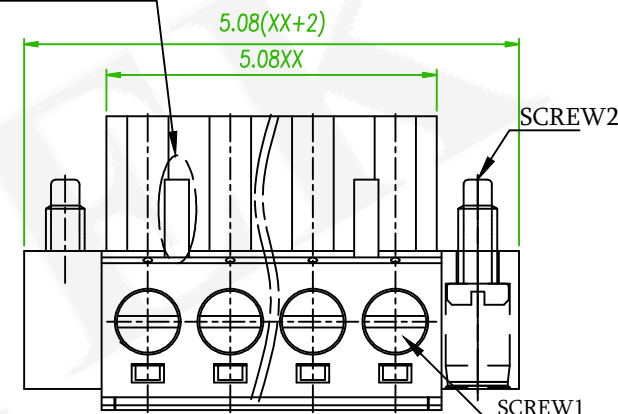

IEC

SAFETY APPROVAL			
OVERVOLTAGE CATEGORY	III	III	II
CONTAMINATION CLASS	3	2	2
RATED VOLTAGE (V)	250	320	630
RATED CURRENT (A)	10	10	10
IMPULSE WITHSTANDING VOLTAGE (KV)	4.0	4.0	4.0
CONDUCTOR CROSS SECTION SOLID/FLEXIBLE (mm ²)	0.5-2.5		



linear dimension(Tolerances Standard GB/T 14486-2008)	—		
---	---	---	---

Variable	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	+0.20	+0.30	+0.50	+0.70	+1.00	+1.30	+1.60	0.10	0.30	0.60

[illegible]

糧德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	TERMINAL BLOCK PLUGGABLE 5.08mm				頁數 Page	1/1
品號 PART NO.	5TP508N-2EKEXXXLX-01			繪圖 DRAWN	Eric 2018/12/06	
圖號 DRAWING NO.	GN011-EA205	版本 REV.	C	核對 CHECKED	Josh 2018/12/06	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Joson 2018/12/06	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		