

MATERIAL
HOUSING: NYLON66, UL94V-0
COVER: NYLON66, UL94V-0
CLAMP: COPPER ALLOY, Sn PLATED
CAGE: COPPER ALLOY, M3/Ni PLATED
SCREW1: STEEL, M3/Zn PLATED, TORQUE: 0.5N.m
SCREW2: STEEL, M2.5/Zn PLATED

MECHANICAL
OPERATING TEMPERATURE: -40°C ~ +105°C
STRIPPING LENGTH: 7~8mm

TECHNICAL DATA

UL/CUL

SAFETY APPROVAL			
USE GROUP	B	C	D
RATED VOLTAGE (V)	300	-	300
RATED CURRENT (A)	15	-	10
WIRE RANGE SOLID/STRANDED (AWG)	28-12		
WITHSTANDING VOLTAGE	1600V (1MIN)		

IEC			
OVERVOLTAGE CATEGORY	III	III	II
CONTAMINATION CLASS	3	2	2
RATED VOLTAGE (V)	250	320	630
RATED CURRENT (A)	12	12	12
IMPULSE WITHSTANDING VOLTAGE (KV)	4.0	4.0	4.0
CONDUCTOR CROSS SECTION SOLID/FLEXIBLE (mm²)	0.2-2.5		

ORDER INFORMATION

5 T P 5 0 8 N -

508
PITCH: 5.08mm

2 K H

SERIES No.

E X X

POLES
(02-24P)

 X L

E: GREEN

X -  0  1


A: TRAY
B: BAG

AMTEK 糧德

2025.02.20

Released DCC

FOR 2 PINS,
ONLY THIS ONE IS AVAILABLE

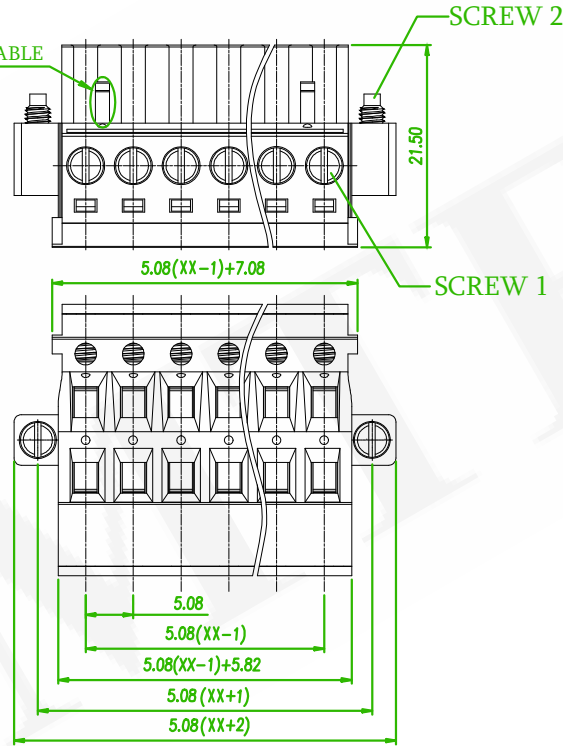

linear dimension(Tolerances Standard GB/T 14486-2008)								—		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	to 10	over 10 to 100	over 100 to 100
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

	ECN NO:240348 Revise the drawing	Gaby	2024/10/18
	ECN NO:230714 Revise the PART NO.	Gaby	2023/09/23
	ECN NO:201215 Revise the PART NO.	Alice	2020/12/30
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	 TERMINAL BLOCK PLUGGABLE 5.08mm				頁數 Page	1/1
品號 PART NO.	 5TP508N-2KHXXXXLX-01 				繪圖 DRAWN	Eric 2018/11/30
圖號 DRAWING NO.	GN011-EA146	版本 REV.	E	核對 CHECKED	Josh 2018/11/30	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/11/30	
公差 TOLERANCE		單位 UNIT	mm	第三 ANGLE PROJECTION		