

MATERIAL 
HOUSING: NYLON66, UL94V-0
COVER: NYLON66, UL94V-0
CLAMP: COPPER ALLOY, Sn PLATED
CAGE: COPPER ALLOY, M3/Ni PLATED
SCREW: STEEL, M3/Zn PLATED, TORQUE: 0.5N.m

ORDER INFORMATION

5

T

P

5

0

8

N

-

2

K

H

N

X

X

X

L

X

-

0

1

508
PITCH: 5.08mm

SERIES No.

POLES
(02-24P)

E: GREEN




A: TRAY
B: BAG

MECHANICAL
OPERATING TEMPERATURE: -40°C~+105°C
STRIPPING LENGTH: 7~8mm

TECHNICAL DATA 
UL/CUL

SAFETY APPROVAL			
USE GROUP	B	C	D
RATED VOLTAGE (V)	300	-	300
RATED CURRENT (A)	15	-	10
WIRE RANGE	28-12		
SOLID/STRANDED (AWG)			
WITHSTANDING VOLTAGE	1600V (1MIN)		
IEC	IEC61984		
OVERVOLTAGE CATEGORY	III	III	II
CONTAMINATION CLASS	3	2	2
RATED VOLTAGE (V)	250	320	630
RATED CURRENT (A)	12	12	12
IMPULSE WITHSTANDING VOLTAGE (KV)	4.0	4.0	4.0
CONDUCTOR CROSS SECTION	0.2-2.5		
SOLID/FLEXIBLE (mm ²)			

FOR 2 PINS,
ONLY THIS ONE IS AVAILABLE

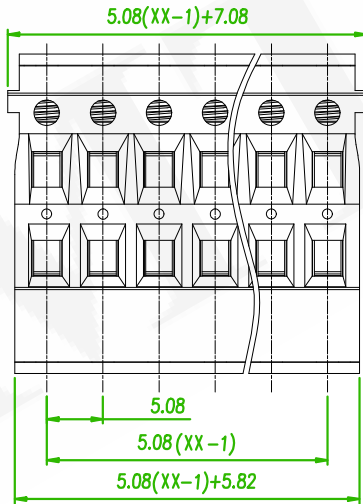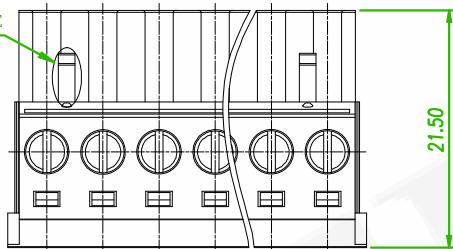

linear dimension (Tolerances Standard GB/T 14486-2008)								—		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

	ECN NO: 240348 Revise the drawing	Gaby	2024/10/17
	ECN NO: 200718 Revise the Tolerance	Alice	2020/09/23
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	TERMINAL BLOCK PLUGGABLE 5.08mm				頁數 Page	1/1
品號 PART NO.	5TP508N-2KHNXXLX-01			繪圖 DRAWN	Eric 2018/11/30	
圖號 DRAWING NO.	GN011-EA148	版本 REV.	C	核對 CHECKED	Josh 2018/11/30	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/11/30	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		