

ELECTRICAL ⚠

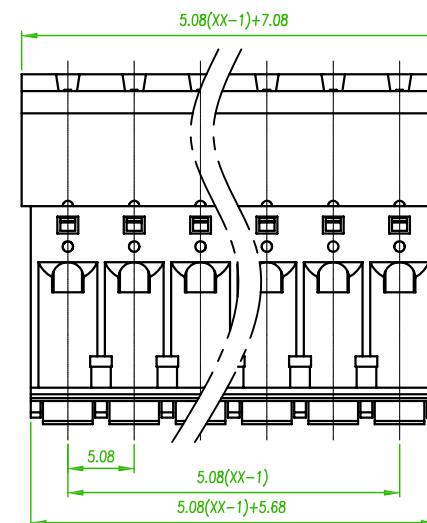
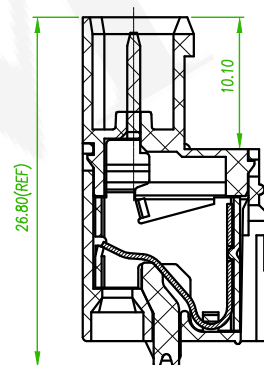
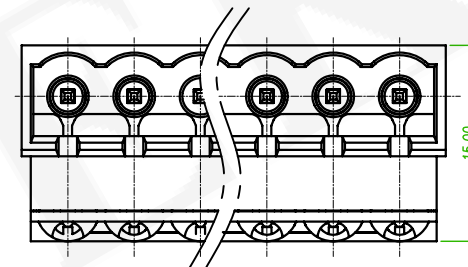
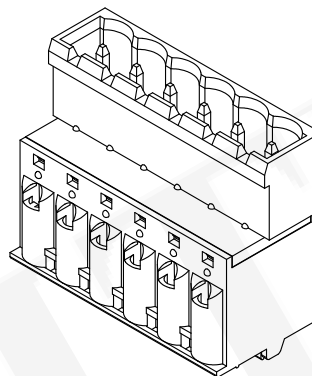
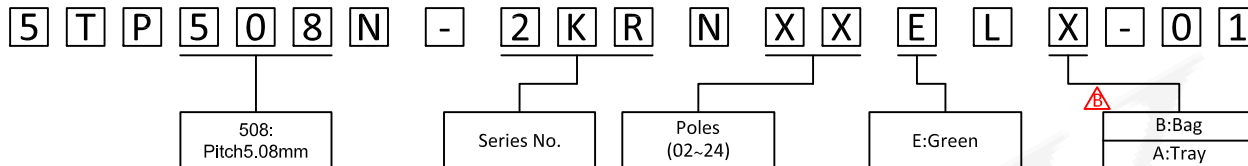
Standard: UL IEC
Rated Voltage: 300V 320V
Rated Current: 10A 12A
Contact Resistance: 20mΩ
Insulation Resistance: 500MΩ / DC 500V
Withstanding Voltage: AC 1600V for one minute
Wire range: 28~12AWG 2.5mm²

MECHANICAL

Temp.Range: -40°C~+105°C
Strip Length: 7-8mm

MATERIAL

Housing: PA66, UL94V-0
Clamp: Copper Alloy, Sn plated
Wire Guard: Stainless steel

ORDER INFORMATION

linear dimension (Tolerances Standard GB/T 14486-2008)									
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 250	over 250 to 500	over 500 to 1000
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30

REV.	Revised the Part No, Add the package option (A), Revised the list, SPEC	Nick	2019/10/01
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	5.08mm Terminal Block				頁數 Page	1/1
	品號 PART NO.	⚠ 5TP508N-2KRNXXELX-01				繪圖 DRAWN	Mia 2018/11/01
	圖號 DRAWING NO.	GN011-MD629	版本 REV.	B	核對 CHECKED	Josh 2018/11/01	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/11/01	
	公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		