

MATERIAL
HOUSING: NYLON66, UL94V-0
COVER: NYLON66, UL94V-0
PIN: COPPER ALLOY, Sn PLATED
CAGE: COPPER ALLOY, M3/Ni PLATED
SCREW: STEEL, M3/Zn PLATED, TORQUE: 0.5N.m
DIN: NYLON66, UL94V-0
NUT: COPPER ALLOY, M2.5

MECHANICAL
OPERATING TEMPERATURE: -40°C~+105°C
STRIPPING LENGTH: 7~8mm

TECHNICAL DATA

UL/CUL

SAFETY APPROVAL			
USE GROUP	B	C	D
RATED VOLTAGE (V)	300	-	300
RATED CURRENT (A)	15	-	10
WIRE RANGE	28-12		
SOLID/STRANDED (AWG)			
WITHSTANDING VOLTAGE	1600V (1MIN)		

IEC IEC61984

OVERVOLTAGE CATEGORY	III	III	II
CONTAMINATION CLASS	3	2	2
RATED VOLTAGE (V)	250	320	630
RATED CURRENT (A)	12	12	12
IMPULSE WITHSTANDING VOLTAGE (KV)	4.0	4.0	4.0
CONDUCTOR CROSS SECTION	0.2-2.5		
SOLID/FLEXIBLE (mm ²)			

ORDER INFORMATION

5 T P 5 0 8 N - 2 R E E X X X L X - 0 1


508
PITCH: 5.08mm

SERIES No.

POLES
(06-24P)

E: GREEN

A: TRAY
B: BAG

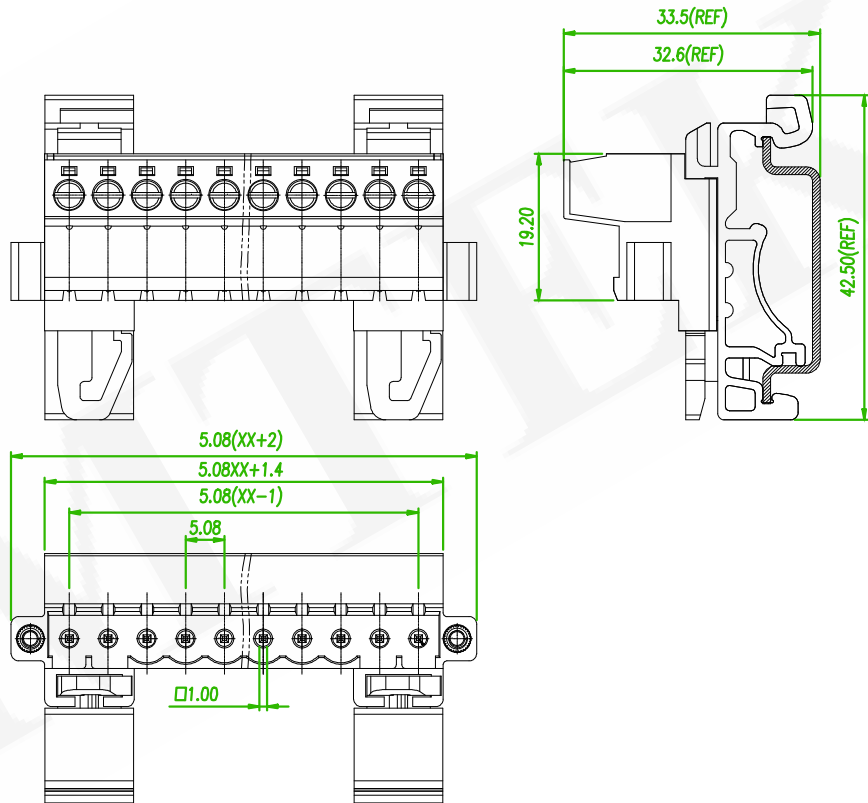

linear dimension (Tolerances Standard GB/T 14486-2008)

		over 6	over 10	over 30	over 60	over 100	over 160		over 10	over 100
variable range	to 6	to 10	to 30	to 60	to 100	to 160	to 10	to 100	to 100	to 100
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

ECN NO: 240348	Revise the drawing	Gaby	2024/11/18
ECN NO: 230714	Revise the PART NO.	Gaby	2023/09/23
ECN NO: 201215	Revise the PART NO.	Alice	2020/12/30
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	TERMINAL BLOCK PLUGGABLE 5.08mm				頁數 Page	1/1
	品號 PART NO.	5TP508N-2REEXXXLX-01				繪圖 DRAWN	ERIC 2018/12/10
	圖號 DRAWING NO.	GN011-EA233	版本 REV.	E	核對 CHECKED	JOSH 2018/12/10	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	JASON 2018/12/10	
	公差 TOLERANCE		單位 UNIT	mm	第三 ANGLE PROJECTION		