

ORDER INFORMATION

ELECTRICAL

Standard: UL IEC
Rated Voltage: 300V 450V
Rated Current: 15A 17.5A
Contact Resistance: 20mΩ
Insulation Resistance: 500MΩ / DC 500V
Withstanding Voltage: AC 2000V for one minute

MACHANICAL






Temp.Range:-40°C~+105°C
Max Soldering:+250°C for 5 Sec

DIMENSIONS

Pitch: 5.08mm
Poles:2-24P

MATERIAL

Housing: PA66, UL94V-0
Clamp:Phosphor Bronze,Tin plated

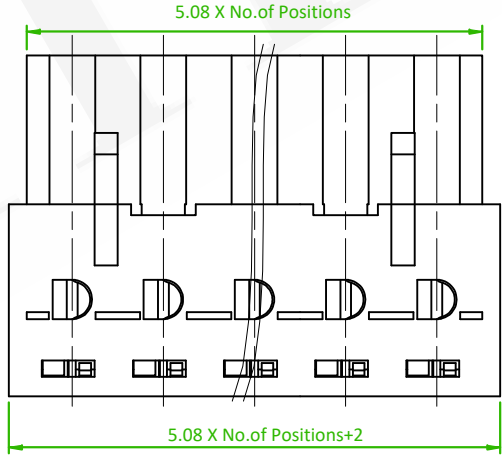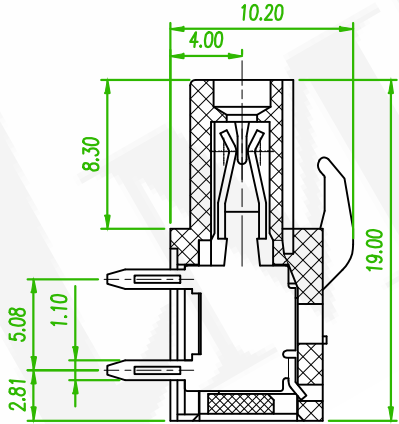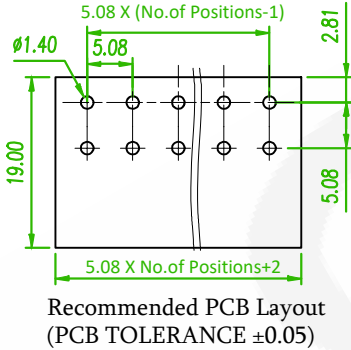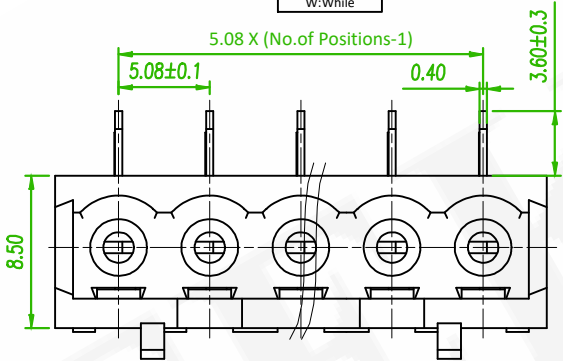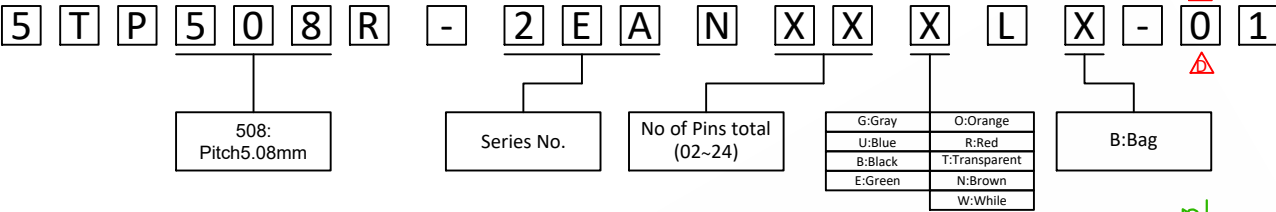

linear dimension(Tolerances Standard GB/T 14486-2008)								—	∕	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

△	ECN NO:230714 Revise the PART NO.	Gaby	2023/09/23
△x2	ECN NO:201215 Revise the PART NO.	Alice	2020/12/30
△x1	ECN NO:200718 Revise the Tolerance	Alice	2020/09/24
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

AMTEK

糧德精密有限公司

Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878

FAX: 886-2-2260-8030

品名	TERMINAL BLOCK PLUGGABLE				頁數	1/1
TITLE	5.08mm DIP R/A TYPE				Page	
品號	5TP508R-2EANXXXLX-01				繪圖	Mia
PART NO.					DRAWN	2016/12/05
圖號	GN011-MC107	版本	D	核對	Jonny	2016/12/05
DRAWING NO.		REV.		CHECKED		
客戶品號		比例	None	承認	Aaron	2016/12/05
CUSTOMER P/N		SCALE		APPROVED		
公差		單位	mm	THIRD ANGLE		
TOLERANCE		UNIT		PROJECTION		

Old Part No. :TB2EA-5.08-XXP-1X-00A-L