

MATERIAL
HOUSING: LCP, UL94V-0
PIN: COPPER ALLOY, Sn PLATED

MECHANICAL
OPERATING TEMPERATURE: -40°C~+130°C
SOLDERING TEMPERATURE: 260°C/10S

TECHNICAL DATA

UL/CUL

SAFETY APPROVAL			
USE GROUP	B	C	D
RATED VOLTAGE (V)	300	-	300
RATED CURRENT (A)	15	-	10
WIRE RANGE	-		
SOLID/STRANDED (AWG)	-		
WITHSTANDING VOLTAGE	1600V (1MIN)		

OVERVOLTAGE CATEGORY	III	III	II
CONTAMINATION CLASS	3	2	2
RATED VOLTAGE (V)	250	320	400
RATED CURRENT (A)	12	12	12
IMPULSE WITHSTANDING VOLTAGE (KV)	4.0	4.0	4.0
CONDUCTOR CROSS SECTION	-		
SOLID/FLEXIBLE (mm ²)	-		



linear dimension (Tolerances Standard GB/T 14486-2008)								—	□	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

△	ECN NO:240348 Revise the drawing.	Gaby	2024/11/12
△	ECN NO:230714 Revise the PART NO.	Gaby	2023/09/23
△x2	ECN NO:201215 Revise the PART NO.	Alice	2020/12/30
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

ORDER INFORMATION

5 T P 5 0 8 R - 2 T H N X X X U X - 0 1





508
PITCH: 5.08mm

SERIES No.

POLES
(02-24P)

B: BLACK

A: TRAY
B: BAG

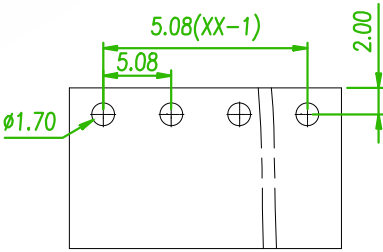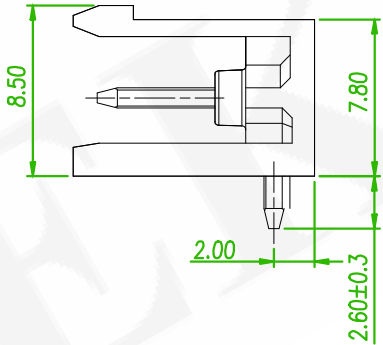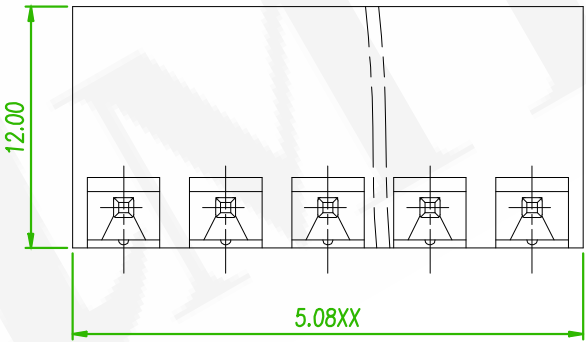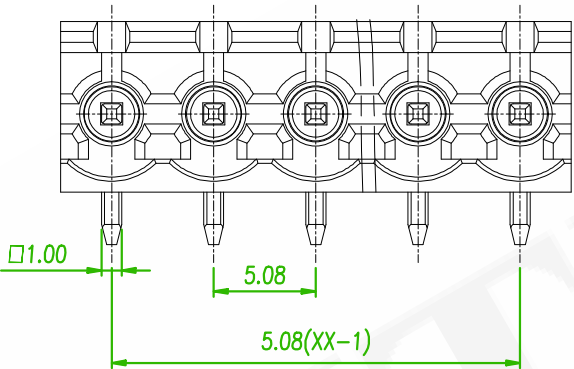

RECOMMENDED PCB LAOUT
(PCB TOLERANCE ±0.05)



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	TERMINAL BLOCK PLUGGABLE 5.08 mm DIP R/A TYPE				頁數 Page	1/1
品號 PART NO.	5TP508R-2THNXXUX-01			繪圖 DRAWN	ERIC 2018/12/05	
圖號 DRAWING NO.	GN011-EA188	版本 REV.	E	核對 CHECKED	JOSH 2018/12/05	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	JASON 2018/12/05	
公差 TOLERANCE		單位 UNIT	mm	第三 ANGLE PROJECTION		