

Electrical

Standard: UL IEC
Rated Voltage: 300V 450V
Rated Current: 15A 17.5A
Contact Resistance: 20mΩ
Insulation Resistance: 500MΩ / DC 500V
Withstanding Voltage: AC 2000V for one minute

ORDER INFORMATION

5	T	P	7	5	0	R	-	2	E	G	N	X	X	E	L	B	-	0	1
750: Pitch 7.50mm						Series No.			No of Pins total (02~24)			E:Green			B:Bag				



Mechanical


Temp.Range:-40°C~+105°C
Max Soldering:+250°C for 5 Sec

Dimensions



Pitch: 7.5mm
Poles:2-24P

Material


Housing: Nylon66, UL94V-0
Pin header: Brass, Tin plated

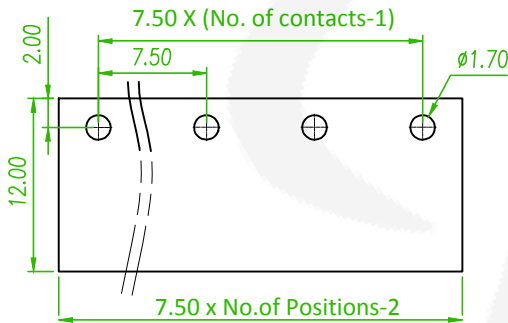

P.C.B. LAYOUT

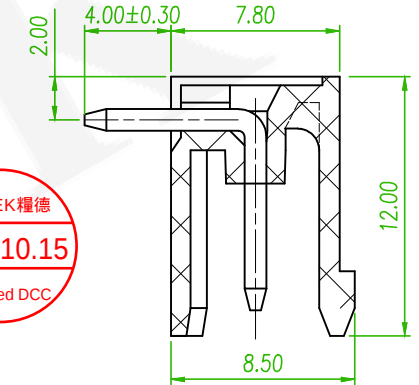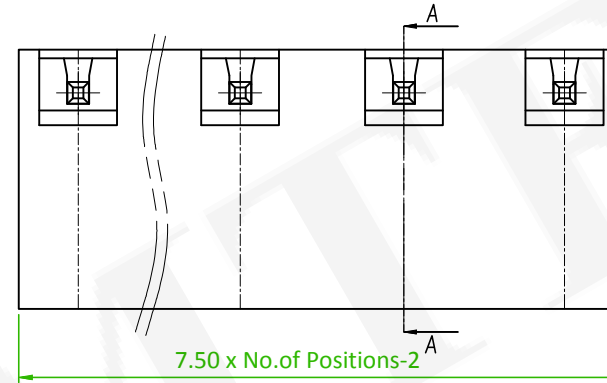

SECTION:A-A

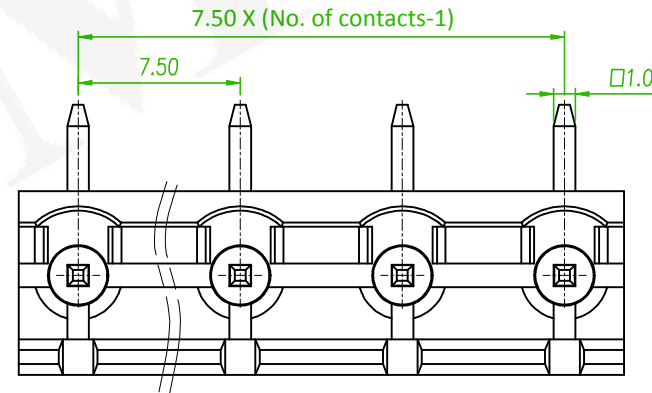

linear dimension (Tolerances Standard GB/T 14486-2008)



Old Part No. :TB2ER-7.5-XXP-1X-00A-L

<i>variable range</i>	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	to 10	over 10 to 100	over 100 to 100
<i>tolerance</i>	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

REV.1

ECN NO:200718 Revise the Tolerance

Alice

2020/09/25

ECN NO. OR DESCRIPTION

REVISED

DATE



糧德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	Terminal Block				頁數 Page	1/1
品號 PART NO.	5TP750R-2EGNXXELB-01				繪圖 DRAWN	Mia 2016/08/18
圖號 DRAWING NO.	GN011-AL337		版本 REV.	B	核對 CHECKED	Boris 2016/08/18
客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Boris 2016/08/18
公差 TOLERANCE			單位 UNIT	mm	THIRD ANGLE PROJECTION	