

MATERIAL
HOUSING: NYLON66, UL94V-0
COVER: NYLON66, UL94V-0
CAGE: COPPER ALLOY, M3/Ni PLATED
SCREW: STEEL, M3/Zn PLATED, TORQUE: 0.5N.m
CLAMP: COPPER ALLOY, Sn PLATED

MECHANICAL
OPERATING TEMPERATURE: -40°C~+105°C
STRIPPING LENGTH: 7~8mm





TECHNICAL DATA

SAFETY APPROVAL			
USE GROUP	B	C	D
RATED VOLTAGE (V)	300	-	300
RATED CURRENT (A)	15	-	10
WIRE RANGE	28-12		
SOLID/STRANDED (AWG)			
WITHSTANDING VOLTAGE	1600V (1MIN)		

IEC			
OVERVOLTAGE CATEGORY	III	III	II
CONTAMINATION CLASS	3	2	2
RATED VOLTAGE (V)	500	630	1000
RATED CURRENT (A)	12	12	12
IMPULSE WITHSTANDING VOLTAGE (KV)	6.0	6.0	6.0
CONDUCTOR CROSS SECTION	0.2-2.5		
SOLID/FLEXIBLE (mm ²)			

ORDER INFORMATION

5	T	P	7	6	2	N	-	2	K	B	N	X	X	X	L	X	-	0	1
762: PITCH 7.62mm							SERIES No.			NO OF POLES TOTAL (02~24P)				E: GREEN		L: RoHS + NYLON 66			

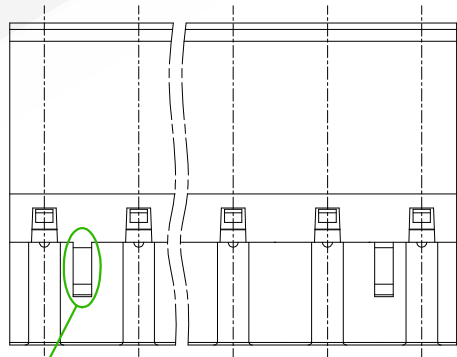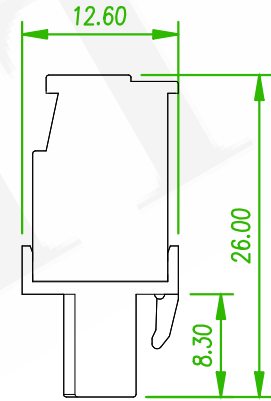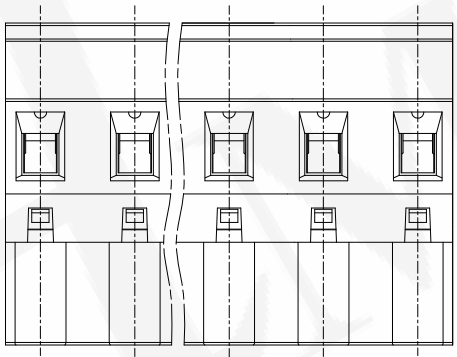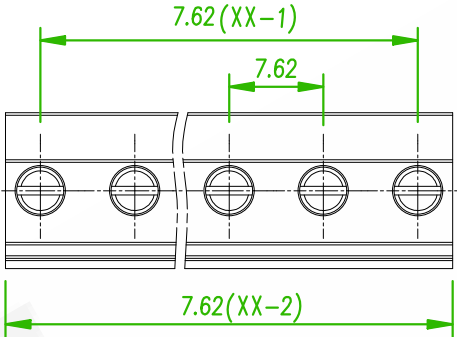

FOR 2 PINS,
ONLY THIS ONE IS AVAILABLE

linear dimension (Tolerances Standard GB/T 14486-2008)									
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30

	ECN NO: 240348 Revise the drawing	Gaby	2024/10/21
	ECN NO: 200718 Revise the Tolerance	Alice	2020/09/25
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	 TERMINAL BLOCK PLUGGABLE 7.62mm				頁數 Page	1/1
品號 PART NO.	 5TP762N-2KBNXXXLX-01				繪圖 DRAWN	Roy 2017/08/31
圖號 DRAWING NO.	GN011-RL968	版本 REV.	C	核對 CHECKED	Carol 2017/08/31	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2017/08/31	
公差 TOLERANCE		單位 UNIT	mm	第三 ANGLE PROJECTION		